

# VC-A61P UHD PTZ IP Camera

**Lumens**<sup>®</sup>

The Lumens<sup>®</sup> VC-A61P UHD Pan / Tilt / Zoom (PTZ) IP camera is equipped with a professional 1 / 2.5 inch image sensor with 4K Ultra HD output at 30fps. The power is supplied through 12V input or the Power over Ethernet (PoE+) providing an economical and easy solution. The superior 30x optical zoom lens, excellent white balance, and exposure mode delivers a clear image even in low light or the extreme contrast of brightness and darkness in a room.

The VC-A61P has different interfaces such as Ethernet, HDMI and 3G-SDI. It supports live broadcasting with H.264 / HEVC (H.265) format. These features not only allow for simultaneous image outputs, they also result in the best image quality and is compatible with all types of video equipment. The camera covers a wide shooting angle and achieves high-speed, quiet, and precise positioning with smooth PTZ operations.

The VC-A61P is applicable for lecture recording, video conferencing, and live broadcasting.



## Key Features

- 4K UHD 30fps and 1080p 60fps video signal output format
- 30x optical zoom, 68 degrees Horizontal Field of View
- Triple stream video, output format H.264 / HEVC (H.265)
- Supports PoE+ (Power over Ethernet) using network cables to supply power
- Ethernet, HDMI and 3G-SDI synchronous image outputs
- Audio input supports AAC / G.711 encoding with 44.1K / 48K sampling frequency
- Free Lumens VMS software for controlling the cameras remotely from a local area network
- Smart AF: AI-Enabled autofocus system
- Supports FreeD protocol for live VR/AR production


## IP Streaming Format

Stream		1		2	3
Settings		HEVC (H.265)		H.264	H.264
Resolution		4K	1080p / 720p	1080p / 1080i / 720p	640x360
Frame Rate	59.94 Hz	29.97	59.94 / 29.97	59.94 / 29.97	29.97
	50 Hz	25	50 / 25	50 / 25	25
Bit Rate		20000 kbps~2000 kbps		20000 kbps~2000 kbps	5000 kbps~512 kbps
Audio Transmission		AAC / G.711			
PoE+		Yes			

# Product Specifications

<b>Sensor</b>	1/2.5" 8.57MP CMOS	<b>Exposure Control</b>	Auto / Manual
<b>Video Format</b>	2160p: 29.97 / 25 1080p: 59.94 / 50 / 29.97 / 25 1080i: 59.94 / 50 720p: 59.94 / 50 / 29.97 / 25	<b>WDR</b>	Yes
<b>Video Output (HD) Interface</b>	3G-SDI / HDMI / Ethernet	<b>3D NR</b>	Yes
<b>Optical Zoom</b>	30x	<b>Image Flip</b>	Yes
<b>Digital Zoom</b>	12x	<b>Preset Positions</b>	256
<b>Horizontal Viewing Angle</b>	68°	<b>Multiple Video Stream</b>	HEVC 4Kp 29.97 H.264 1080p 59.94 H.264 640x360p 29.97
<b>Vertical Viewing Angle</b>	38.3°	<b>Audio Compression Format</b>	G.711 / AAC
<b>Diagonal Viewing Angle</b>	78°	<b>Control Interface</b>	RS-232 / RS-422 / Ethernet
<b>Panning Angle</b>	+170° ~ -170°	<b>Control Protocol</b>	VISCA / PELCO D / ONVIF / FreeD
<b>Panning Speed</b>	300°/sec	<b>Tally Light</b>	Yes
<b>Tilting Angle</b>	+90° ~ -30°	<b>PoE</b>	PoE+ (IEEE802.3at)
<b>Tilting Speed</b>	300°/sec	<b>Video Stream</b>	RTSP / RTMP / RTMPS / MPEG-TS / SRT
<b>Aperture</b>	F1.6 ~ F3.4	<b>Video Compression</b>	HEVC(H.265) / H.264
<b>Focal Length</b>	4.6mm ~ 135mm	<b>Audio Input</b>	Line In / MIC In (Phone Jack 3.5mm x1)
<b>Shutter Speed</b>	1/1 ~ 1/10,000 sec	<b>Audio Output</b>	Ethernet / SDI / HDMI
<b>Minimum Object Distance</b>	1.5m (Wide / Tele)	<b>IR Pass-Through</b>	Yes
<b>Video S/N Ratio</b>	> 50dB	<b>IR Receiver</b>	Yes
<b>Minimum Illumination</b>	0.1 lux (F1.6, 50IRE, 30fps)	<b>IR Remote Control</b>	Yes
<b>Focus System</b>	Auto / Manual	<b>DC In</b>	12V +/- 20%
<b>Gain Control</b>	Auto / Manual	<b>Power Consumption</b>	PoE : 18W DC In : 16W
<b>White Balance</b>	Auto / Manual	<b>Weight</b>	4.4 lbs (2 kg)
		<b>Dimensions</b>	6.9" x 7.5" x 7.3" (174 x 190 x 187 mm)

## I/O CONNECTIONS

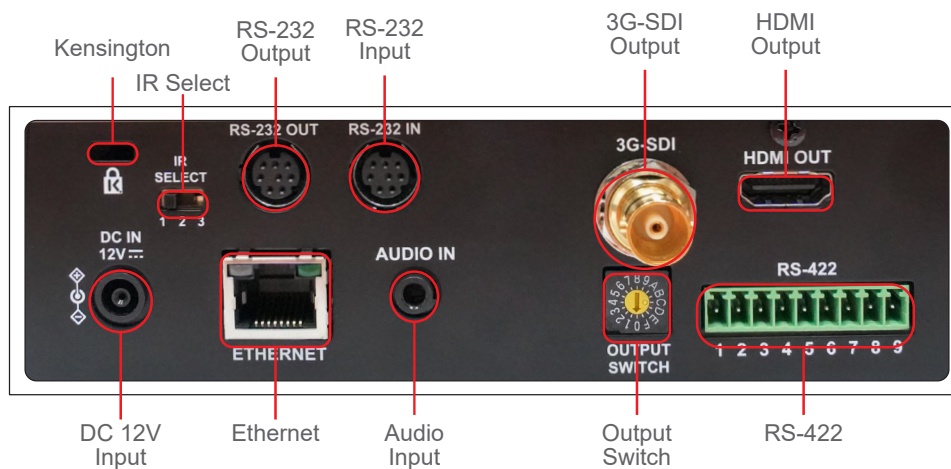

**Lumens**<sup>®</sup>

www.MyLumens.com

Lumens Integration, Inc.  
4116 Clipper Court  
Fremont, CA, 94538  
Phone : +1-866-600-0988  
Fax: +1-510-252-1389

Lumens Europe  
De Nayerstraat 17 9470  
Denderleeuw Belgium  
Phone : +32-473-58-38-95  
Fax: +32-2-452-76-00

