

VC-A53 Firmware(FW) Upgrade Instruction

Read me first!!





After performing a Factory Reset, all previously configured parameters will be restored to their default settings.

Therefore, please make sure to export the Profile before performing the Factory Reset. After the factory reset is completed, import the Profile to restore the original settings.



1 Device and Tool Preparation


1.1 Please prepare following devices and tools before FW upgrade.

Camera	PC or Laptop
	
Power adapter and power cord	Ethernet cable
	

2 Connections


2.1 Connecting via switch or router

2.1.1 Please ensure the [Ethernet]> [DHCP] in the menu is ON.

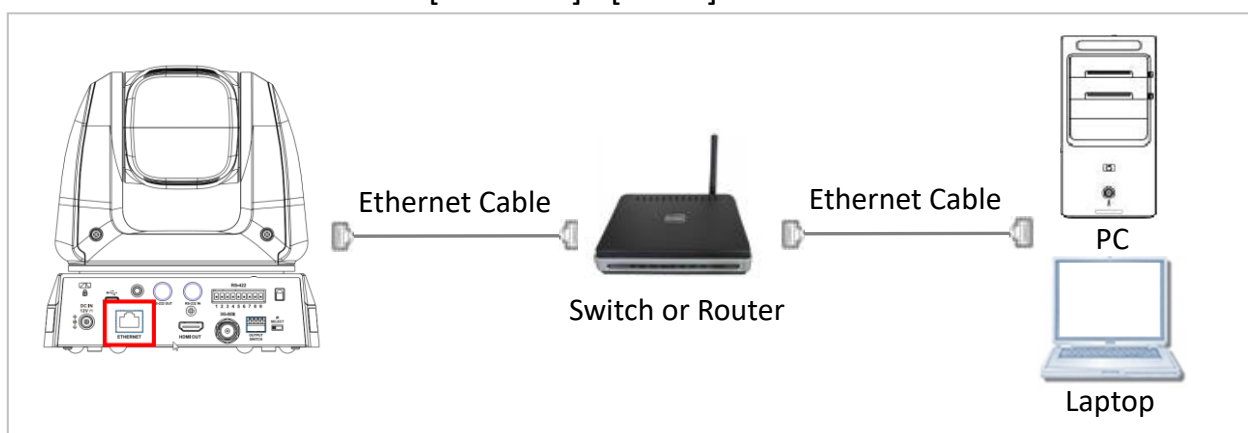

3 FW Download


- 3.1 Open browser and enter the IP address of the camera in the address bar.
You can check the IP address from [Status]> [Ethernet] in the menu.

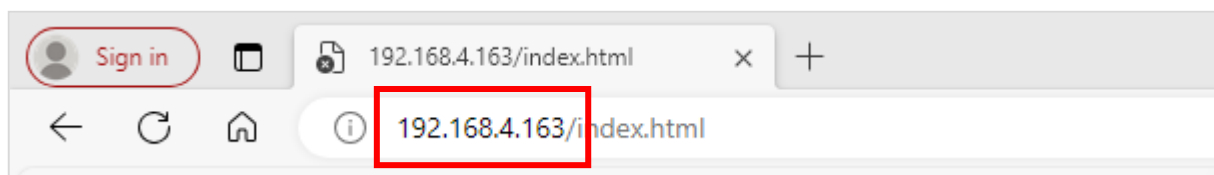


- 3.2 Enter the account and password to log in webpage.
Account: admin
Password: 9999(Default)

A screenshot of a login page. At the top, it says 'Sign in to access this site'. Below that, it shows 'Authorization required by http://192.168.4.163' and 'Your connection to this site is not secure'. There are two input fields: 'Username' with the text 'admin' and 'Password' with four dots. Below the password field is a blue 'Sign in' button, which is highlighted with a red rectangular box. To the right of the 'Sign in' button is a grey 'Cancel' button.


- 3.3 Select [Maintenance]> [...] to select firmware file and press [Upgrade].

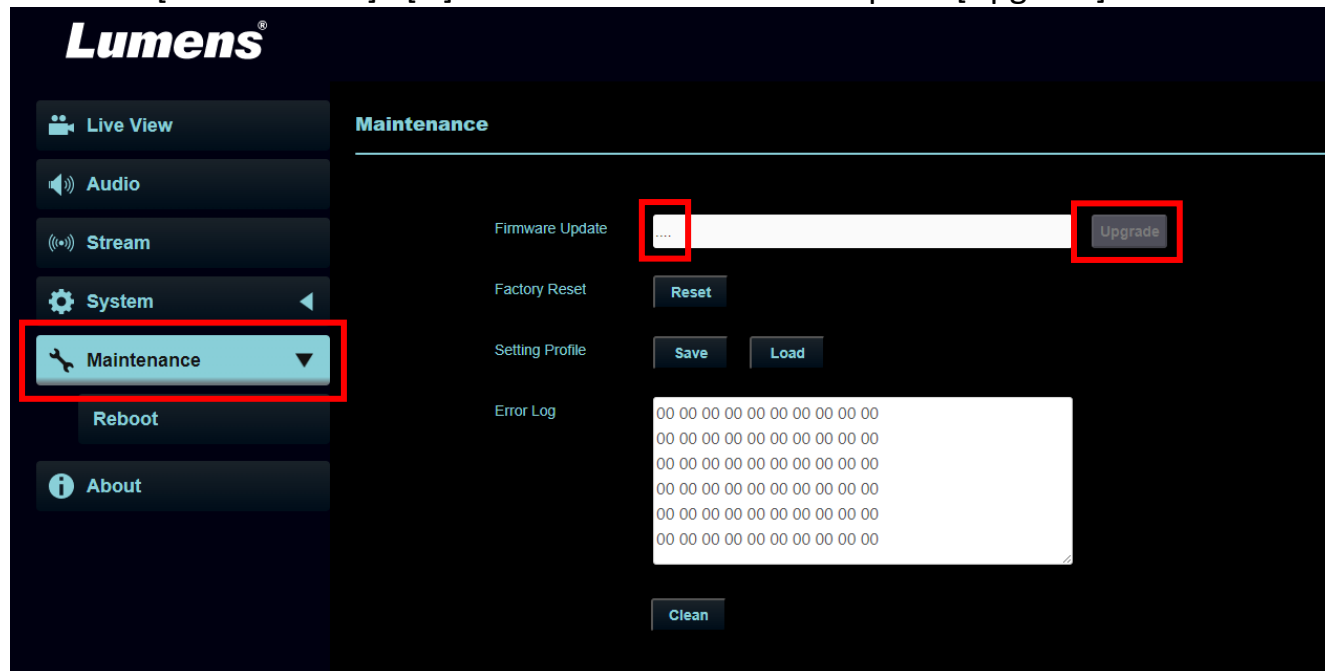


3.4 FW download starts. (Around 2 minutes taken)

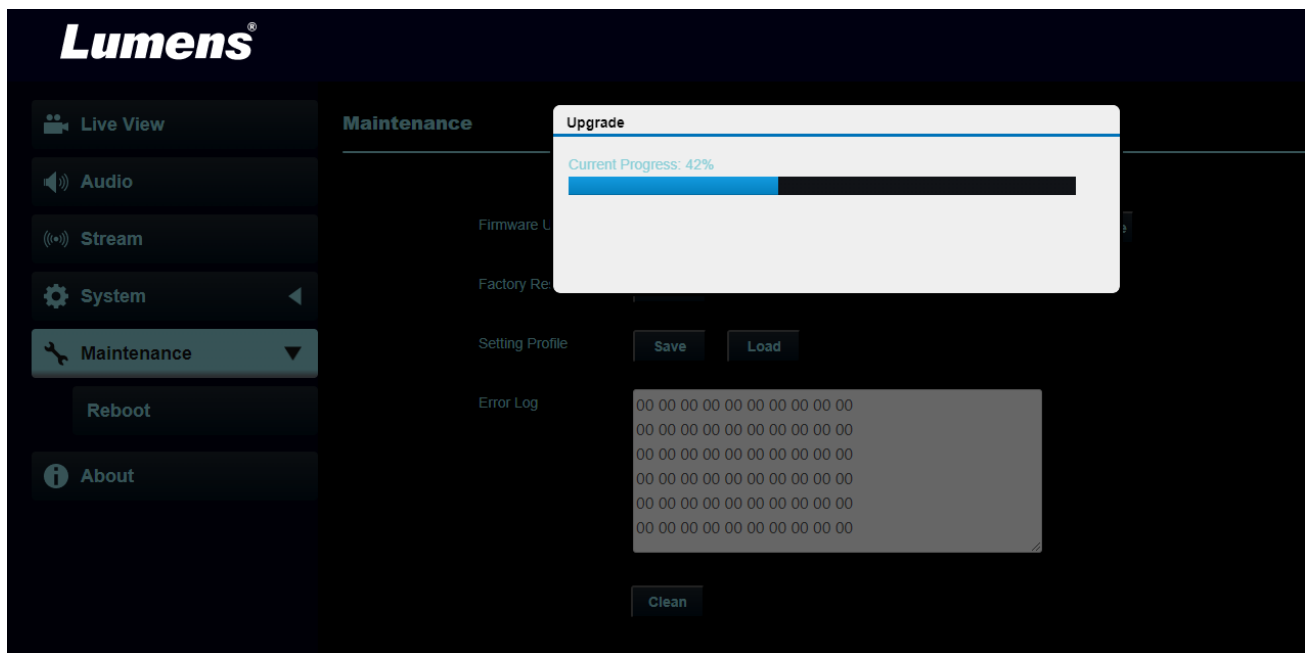


3.5 FW upgrade is successful, click [OK] and the camera will reboot.

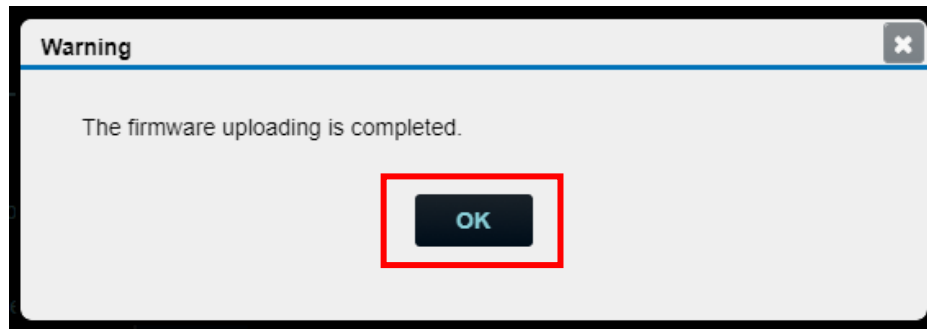

3.6 Please Login and go [Maintenance]> [Reset] and do the [Factory Reset] to ensure the procedure is completed.

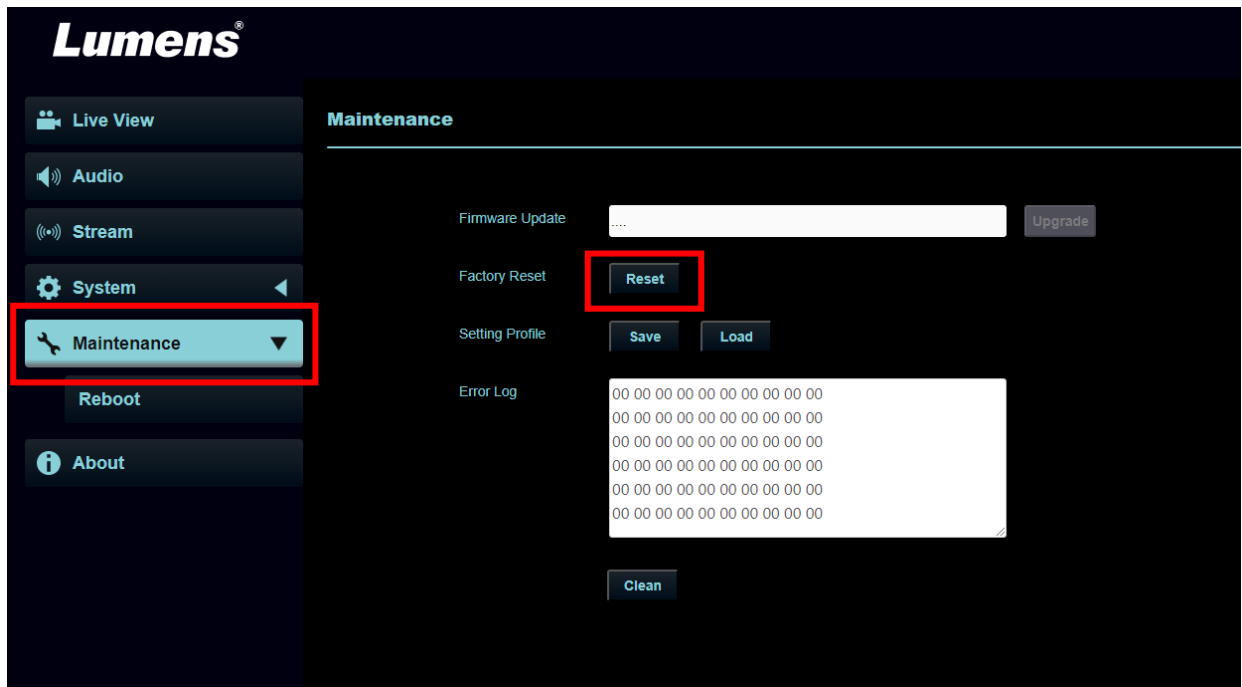

3.7 Click [Yes] and the unit will do the factory reset.

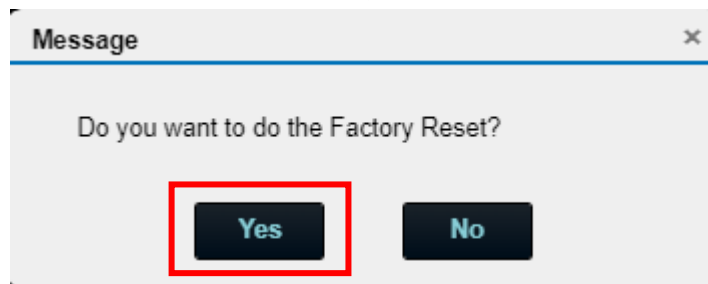

3.8 Login webpage again and check the FW version from [About]> [Firmware Version]

