


LC-RC01

Remote control panel

(Remote Control Panel)

User Manual - English

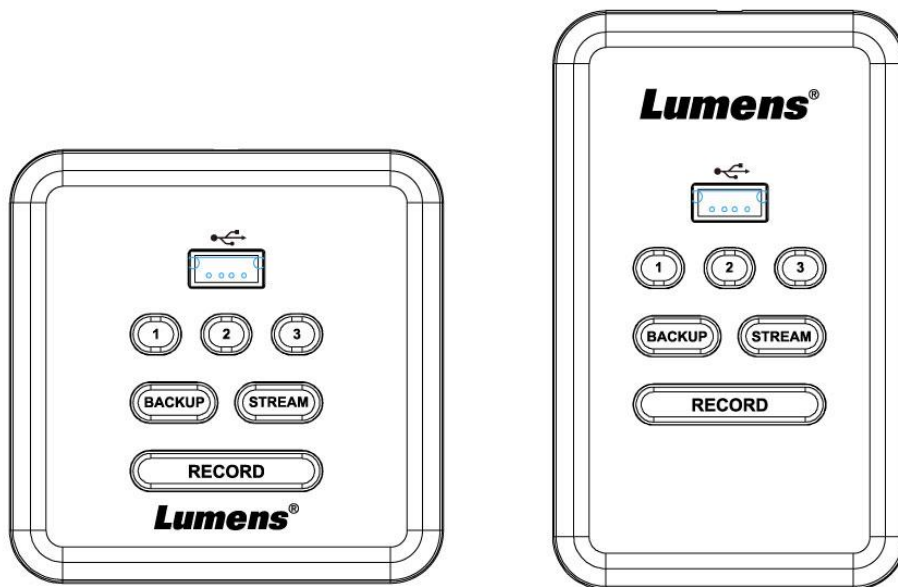

[Important]


To download the latest version of Quick Start Guide, multilingual user manual, software, or driver, etc., please visit Lumens
<https://www.MyLumens.com/support>

Table of Contents

Chapter 1	Package Contents	2
Chapter 2	Product Overview	3
2.1	LC-RC01 adapter	3
2.2	LC-RC01 control box	3
2.3	Size.....	4
Chapter 3	Instruction for installation	5
3.1	Secure the adapter to the media processor with screws and connect the DC power and USB.....	5
3.2	Use the CAT5e network cable for connection (the length shall not exceed 30 meters).....	5
3.3	Pass a cable tie through the mounting hole to secure the network cable onto the LC-RC01 control box.	6
3.4	Install the control box on the wall	6
Chapter 4	Function Description	7
4.1	Button function description	7
4.2	LED Indicator Description	7
4.3	Web Page Function.....	8
Chapter 5	Troubleshooting.....	9
Chapter 6	Safety Instructions	10
	Copyright Information	11


Chapter 1 Package Contents

LC-RC01



(Appearance may vary depending on country/ region)

Power Adapter



M3 x4 Flat Head(x2)




Quick Installation Guide



Chapter 2 Product Overview

2.1 LC-RC01 adapter


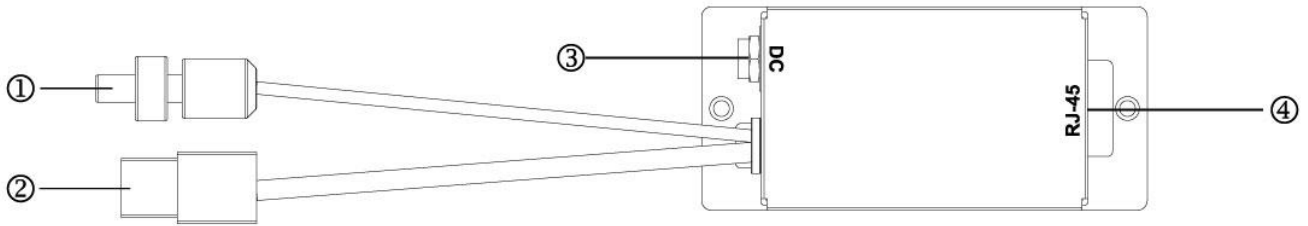


NO.	Item	Function Descriptions
1.	DC Power output connector	Connecting to the recording system
2.	USB control connector	Connecting to the USB port on recording system <Remark> LC200 needs to connect to the USB port "below"
3.	DC power input interface	Connecting the power cord originally connected to the recording system to this power input port
4.	RJ-45 network port	Connecting to RJ45 network port of the control box

2.2 LC-RC01 control box


Front View

Bottom

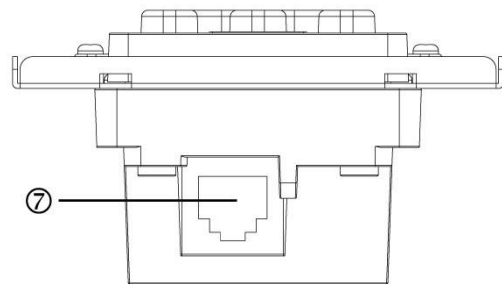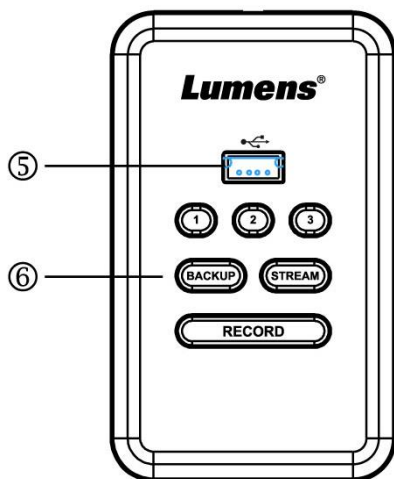


NO.	Item	Function Descriptions
5.	USB 2.0 port	The USB flash disk can be inserted for backup
6.	Function buttons	Please refer to 4.1 Button function description
7.	RJ-45 port	Connecting to RJ45 network port of the adapter

2.3 Size

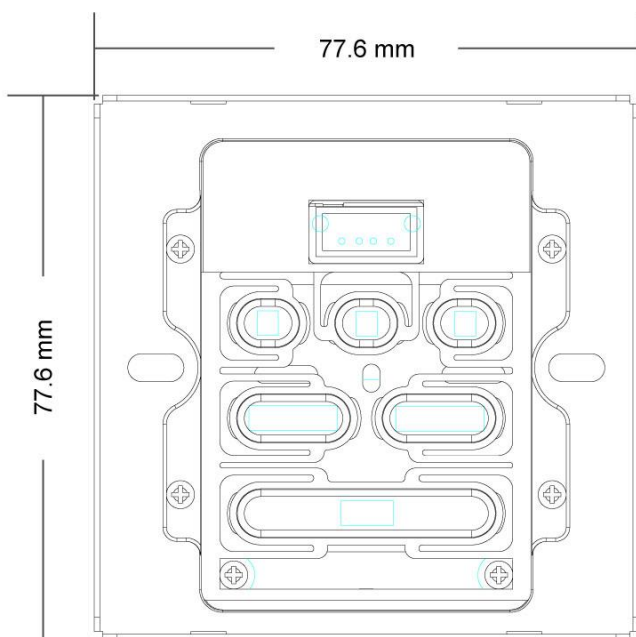

LC-RC01E
EU Regulations

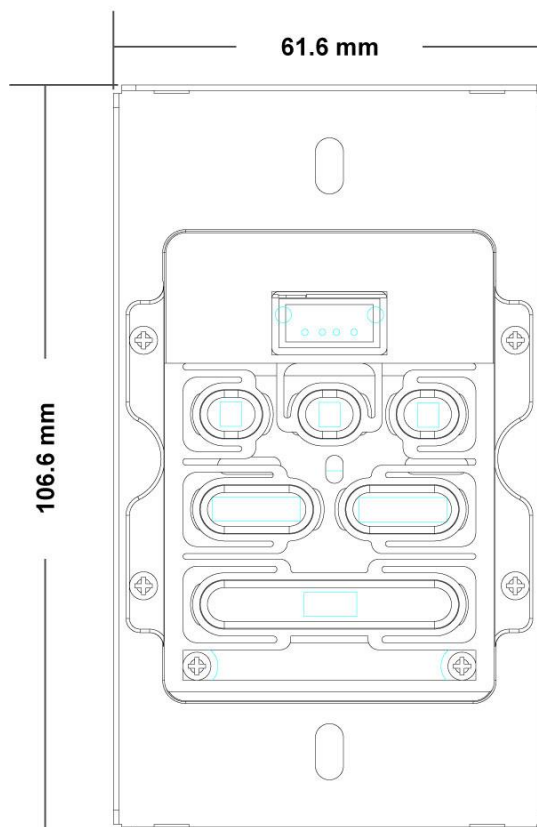


LC-RC01U
North America
Regulations


Chapter 3 Instruction for installation

3.1 Secure the adapter to the media processor with screws and connect the DC power and USB.


LC100 / LC100N

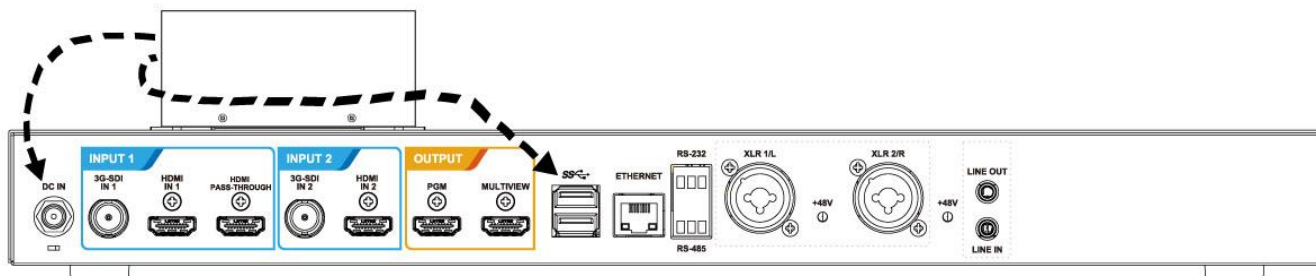


LC200

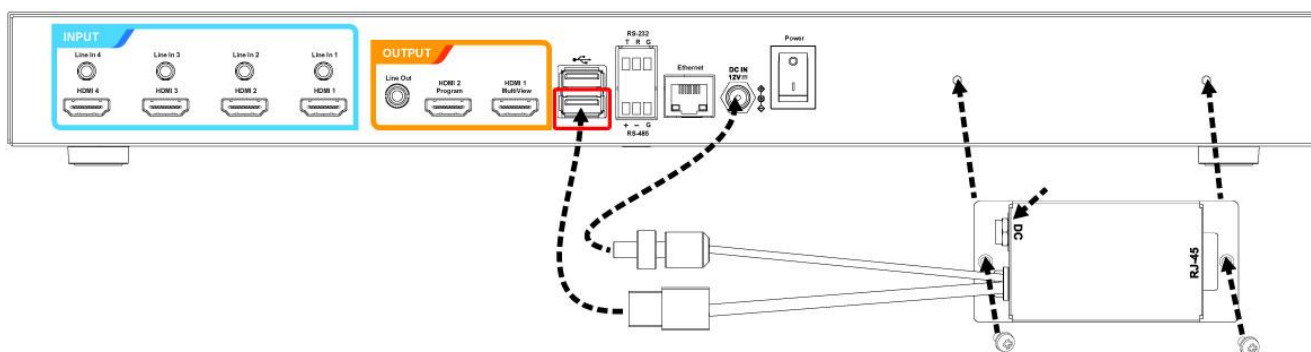


3.2 Use the CAT5e network cable for connection (the length shall not exceed 30 meters)

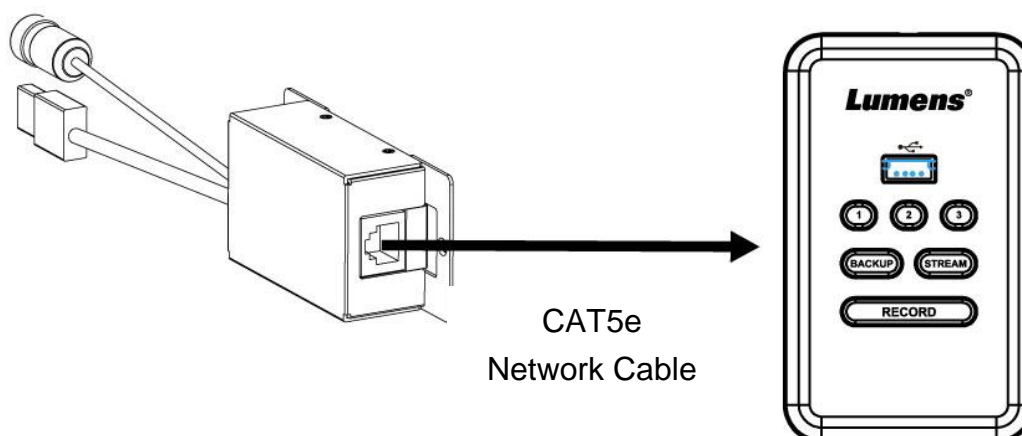

3.3 Pass a cable tie through the mounting hole to secure the network cable onto the LC-RC01 control box.

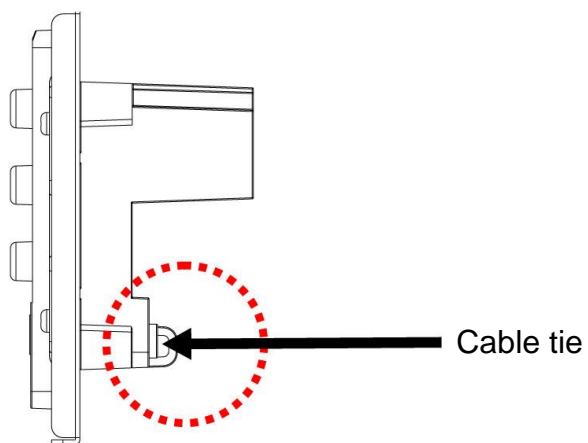


3.4 Install the control box on the wall

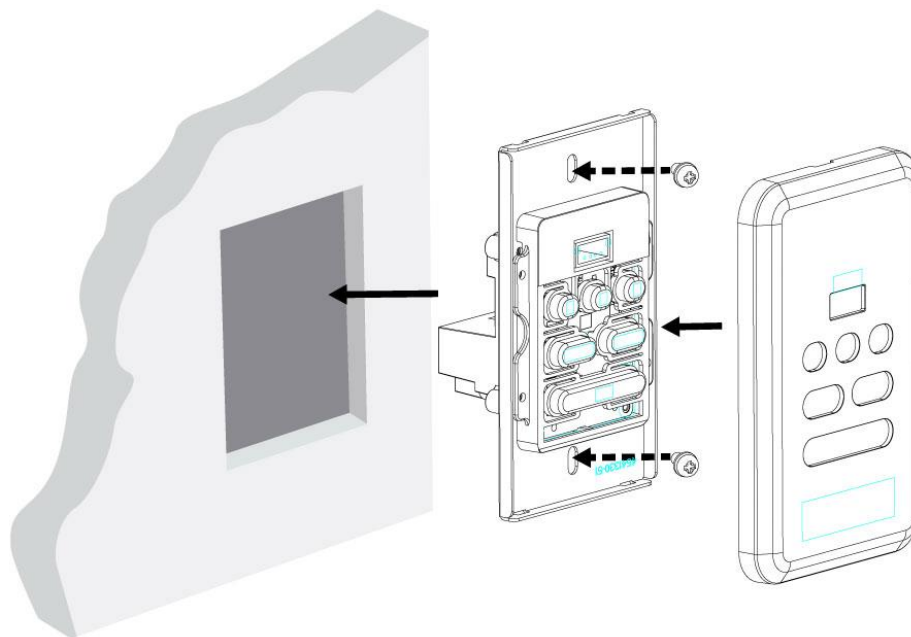

Chapter 4 Function Description

4.1 Button function description

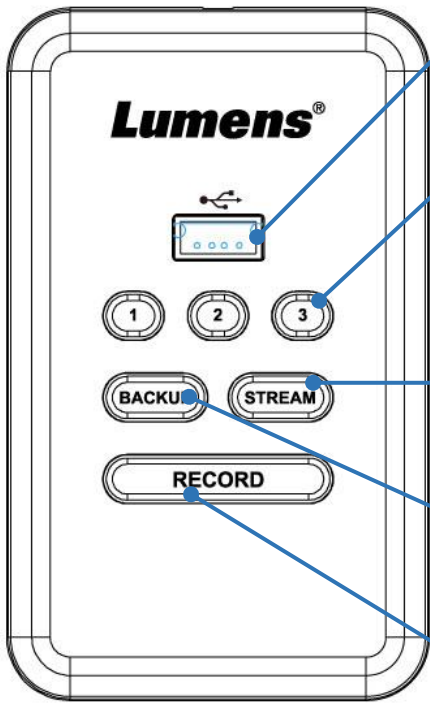

USB 2.0 Port: Is available for inserting the USB flash disk

1 / 2 / 3 : Switch the Marco setting 1~3 to change the scene and camera preset position. Please refer to [4.3.2 Macro Settings](#) for relevant settings.

STREAM : Press the button once to begin streaming; press the button again to stop streaming

BACKUP : Press the button once to start the backup; press the button again to stop the backup (back up the last video directory to the

RECORD : Press the button once to begin recording; press the button again

4.2 LED Indicator Description

Button	Indicator	Status description
1 / 2 / 3	N	The device is not in Macro mode
	Blue light	The device is in Macro mode
BACKUP	N	The USB flash disk is not detected by the recording system
	Blue light	The USB flash disk is detected by the recording system
	Blue light flickering	The device is backing up the data onto the USB flash disk Press again to cancel back up
	Red light flickering 6 times	Error in writing the data into the USB flash disk
STREAM	N	Unpowered
	Blue light	Powered, but Push is not enabled Press again to enable Push
	Red light	Pushing; press again to stop Push
Record	N	Unpowered
	Blue light	Powered, but the record is not enabled Press again to enable the record
	Red light	Recording; press again to stop record
	Red light flickering 6 times	Error or failure during recording

<Remark> All indicators turn into flickering blue light: LC-RC01 is not connected to the recording system. Please check the connection of the recording system.

4.3 Web Page Function

4.3.1 Remote control panel connection

Log in to the web page, Click [System] > [Remote Control Panel] to check the connection status between the recording system and LC-RC01

■ Connected

Remote Control Panel		
Information		
Model Name	FW Version	Connected
LC-RC01	VAG100	OK / Fail

■ Disconnected

Remote Control Panel		
Information		
Model Name	FW Version	Connected

4.3.2 Macro Settings

Log in to the web page, Click [Scenes] > [Macro]

■ LC-RC01 [1~3] buttons correspond to Macro [1~3] Settings

NO.	Function Descriptions
1	Select a scene to be set. Each supports up to 9 sets of scene. <Remark> If the layout of the scene needs to be change, please refer to the user manual of recording system
2	Set/Cancel [Camera Preset Position]. Each supports up to 9 sets of camera preset position selection.

Chapter 5 Troubleshooting

This chapter describes problems you may encounter while using LC-RC01. If you have questions, please refer to related chapters and follow all the suggested solutions. If the problem still occurred, please contact your distributor or the service center.

NO.	Problems	Solutions
1	After installation, LC-RC01 is not detected by the recording system	Please refer to Chapter 3 Instruction for installation to ensure that USB cable is inserted into the “below” USB port of LC200
2	No indicator is shown on the LC-RC01 panel	Please refer to Chapter 3 Instruction for installation to ensure that the control box properly connects to the adapter by the CAT5e network cable

Chapter 6 Safety Instructions

Always follow these safety instructions when setting up and using the LC-RC01 Remote Control Panel:

1 Operation

- 1.1 Please use the product in the recommended operating environment, away from water or source of heat
- 1.2 Do not place the product on a tilted or unstable trolley, stand or table.
- 1.3 Please clean the dust on the power plug prior to usage. Do not insert the product's power plug into a multiplug to prevent sparks or a fire.
- 1.4 Do not block the slots and openings in the case of the product. They provide ventilation and prevent the product from overheating.
- 1.5 Do not open or remove covers, otherwise it may expose you to dangerous voltages and other hazards. Refer all servicing to licensed service personnel.
- 1.6 Unplug the product from the wall outlet and refer servicing to licensed service personnel when the following situations happen:
 - If the power cords are damaged or frayed.
 - If liquid is spilled into the product or the product has been exposed to rain or water.

2 Installation

- 2.1 For security considerations, please make sure the standard mount you use is in line with UL or CE safety approbations and installed by technician personnel approved by agents.

3 Storage

- 3.1 Do not place the product where the cord can be stepped on as this may result in fraying or damage to the lead or the plug.
- 3.2 Unplug this product during thunderstorms or if it is not going to be used for an extended period.
- 3.3 Do not place this product or accessories on top of vibrating equipment or heated objects.



4 Cleaning

- 4.1 Disconnect all the cables prior to cleaning and wipe the surface with a dry cloth. Do not use alcohol or volatile solvents for cleaning.

5 Batteries (for products or accessories with batteries)

- 5.1 When replacing batteries, please only use similar or the same type of batteries
- 5.2 When disposing of batteries or products, please adhere to the relevant instructions in your country or region for disposing of batteries or products

■ Precautions

	This symbol indicates that this equipment may contain dangerous voltage which could cause electric shock. Do not remove the cover (or back). No user-serviceable parts inside. Refer servicing to licensed service personnel.		This symbol indicates that there are important operating and maintenance instructions in this User Manual with this unit.
---	---	--	---

■ FCC 警告

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

Notice :

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment..

本設備符合 FCC 規則第 15 部分的規定。本設備已經過測試，符合 A 類設備的限制。這些限制旨在為在商業環境操作設備提供合理的保護，以防止有害干擾。

■ IC Warning

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus as set out in the interference-causing equipment standard entitled "Digital Apparatus," ICES-003 of Industry Canada.

Cet appareil numérique respecte les limites de bruits radioélectriques applicables aux appareils numériques de Classe A prescrites dans la norme sur le matériel brouilleur: "Appareils Numériques," NMB-003 édictée par l'Industrie.

■ EN55032 CE Warning

Operation of this equipment in a residential environment could cause radio interference.

Warning: Operation of this equipment in a residential environment may cause radio interference

Copyright Information

Copyrights © Lumens Digital Optics Inc. All rights reserved.

Lumens is a trademark that is currently being registered by Lumens Digital Optics Inc.

Copying, reproducing or transmitting this file is not allowed if a license is not provided by Lumens Digital Optics Inc. unless copying this file is for the purpose of backup after purchasing this product.

In order to keep improving the product, the information in this file is subject to change without prior notice.

To fully explain or describe how this product should be used, this manual may refer to names of other products or companies without any intention of infringement.

Disclaimer of warranties: Lumens Digital Optics Inc. is neither responsible for any possible technological, editorial errors or omissions, nor responsible for any incidental or related damages arising from providing this file, using, or operating this product.