




Lumens[®] |

CamConnect Pro & Audio-Technica ATUC-50 Setting Guide

Overview

1. System Connection diagram
2. Finding Audio-Technica ATUC-50CU IP Address.
3. Login Audio-Technica ATUC-50CU webpage
4. Check Audio-Technica ATUC-50CU network setting
5. Audio-Technica ATUC-50CU conference mode selection
6. Audio-Technica ATUC-50CU connection with CamConnect Pro
7. CamConnect Pro and ATUC-50CU camera mapping and demo
8. Others

System Connection diagram

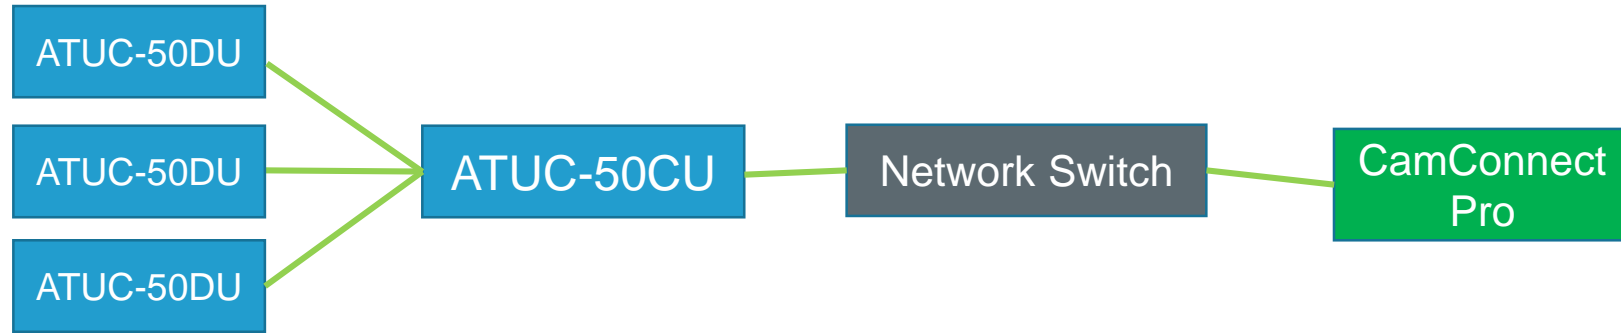


Connect to
network




Finding Audio-Technica ATUC-50CU IP Address

Use ATUC-50CU front-panel button to check its IP Address.

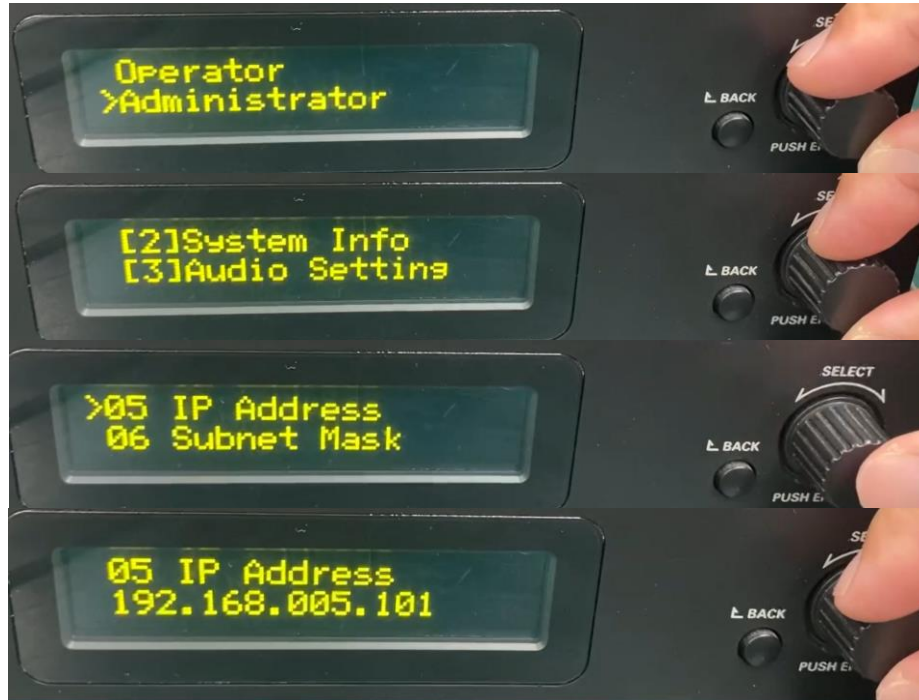

Login Audio-Technica ATUC-50CU webpage

- Enter Audio-Technica ATUC-50CU IP address in a web browser.
- Select Administrator and Login.
- Access Setting & Maintenance.

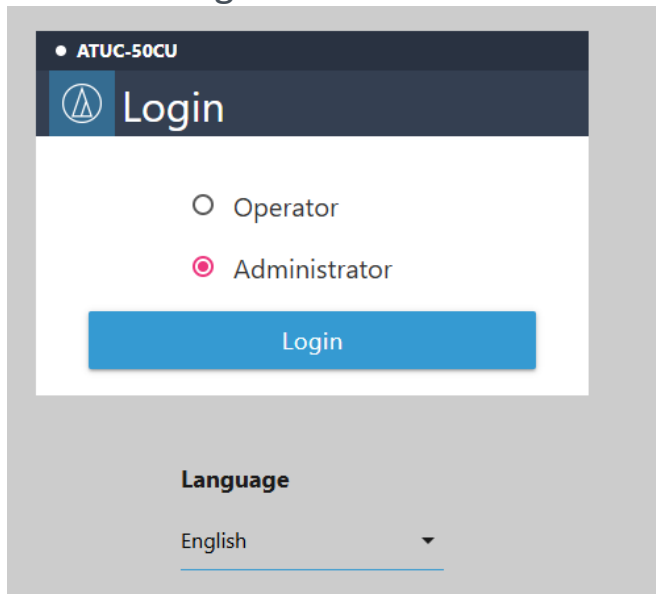

Setup Conference




Start Conference



Settings & Maintenance





Check network setting

- Go to [Network], enable Notification & Audio Level Notification.
- If CamConnect Pro connects to multiple Audio-Technica microphones, please make their [Multicast Port Number] different. For example: Mic A is 17000, Mic B is 17001, Mic C is 17002, ...etc.
- **Do not change [Port number]. This should be 17300.**

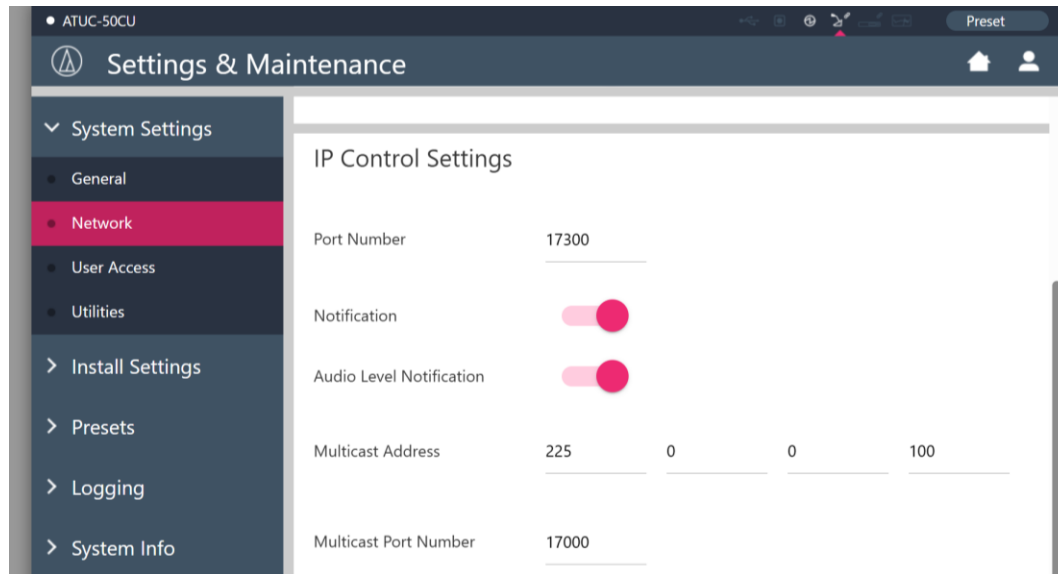

Conference mode selection - 1

- Access Setup Conference.
- Select [Current Setting].
- Select [Free Talk] mode.

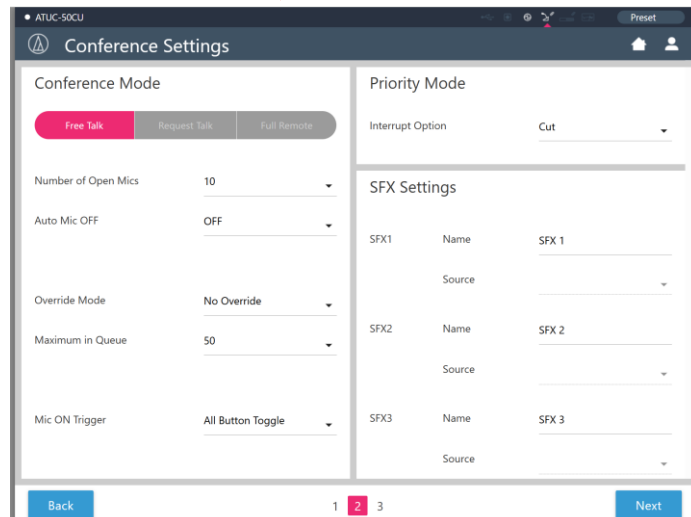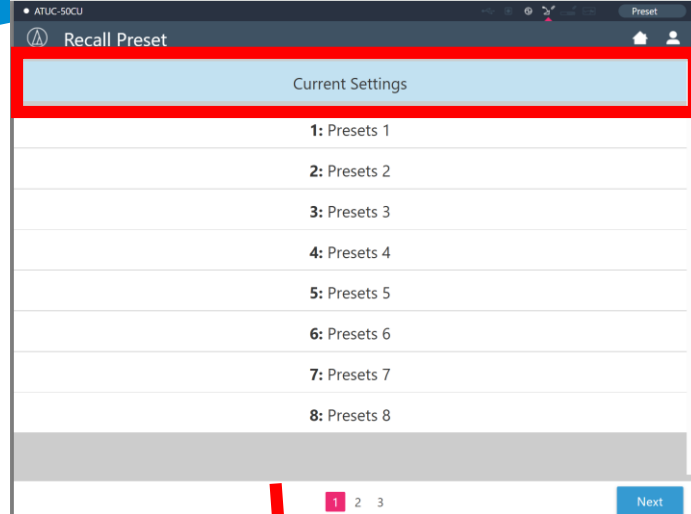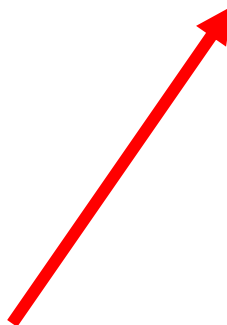

Conference mode selection - 2

- Access Setup Conference.
- Select [Current Setting].
- Select [Free Talk] mode.
- Mic ON Trigger:
 1. All Button Toggle: Press button will keep Mic on, and then press button will let Mic off.
 2. All Push to Talk: Pressing button will keep Mic on. When release the button, the Mic will be off.
 3. All Voice: Do not need to press button, you could use voice to turn Mic on.

Conference Manager Audio Control **Conference Settings**

Conference Mode

Free Talk Request Talk Full Remote

Number of Open Mics 10

Auto Mic OFF OFF

Override Mode FIFO

Mic ON Trigger

Mic ON Hold Time

All Button Toggle

All Push to Talk

All Voice

Priority Mode

Interrupt Option Cut

SFX Settings

SFX1 Name Source

SFX2 Name Source



SFX3 Name Source

Individual

No Connected DU

Conference mode selection - 3


- Arrange the Mic ID number in [Conference Manager]

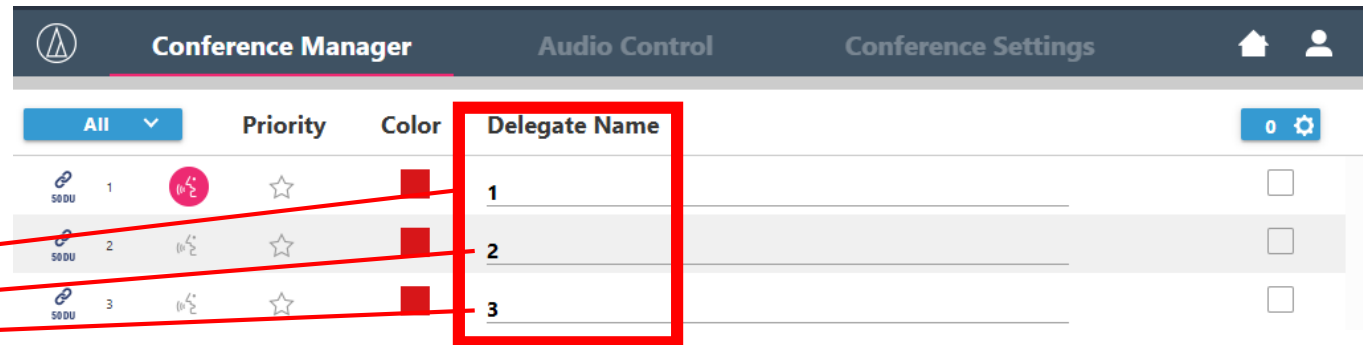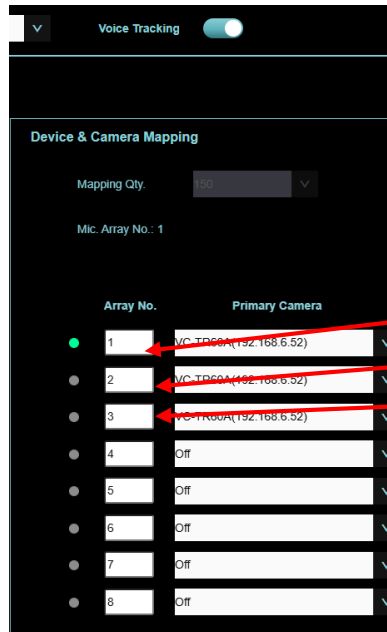

Audio-Technica ATUC-50 connection with CamConnect Pro

In CamConnect Pro web browser; (as shown below)

- Device select Audio-Technica ATUC-50CU
- Enter ATUC-50CU 's IP address.
- Make other settings like; time to trigger and back to home as you wish.
- Hit Apply then toggle the Connect button to the right.

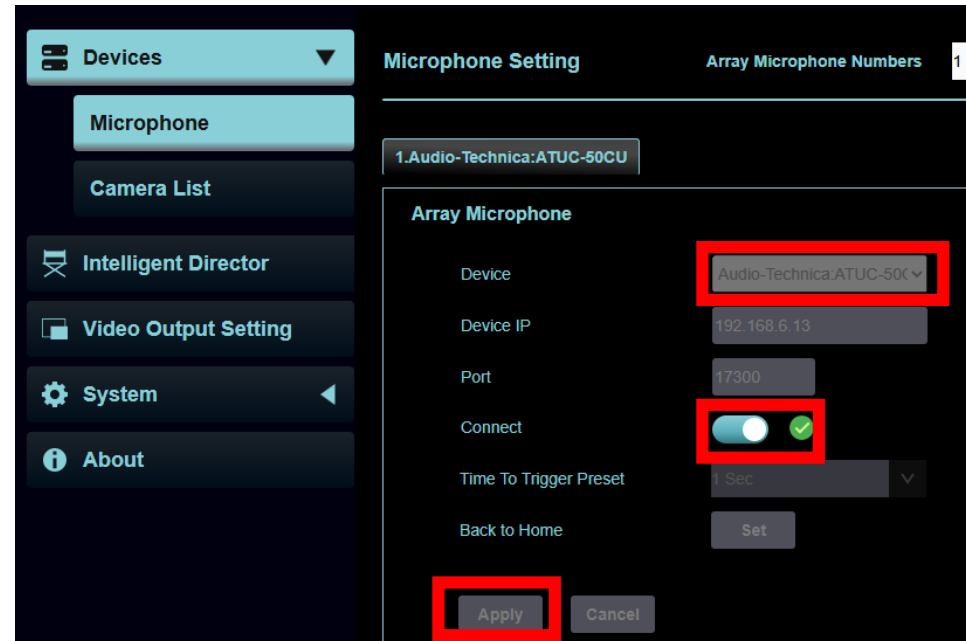


CamConnect Pro and ATUC-50 - Camera mapping and demo

Map the camera presets per ATUC-50DU units/seats.

For example: 1 camera and 3 seats are assigned in “All Voice” mode.

As shown on the right photo :
Seat 1 talker triggers camera VC-TR60A to preset 1

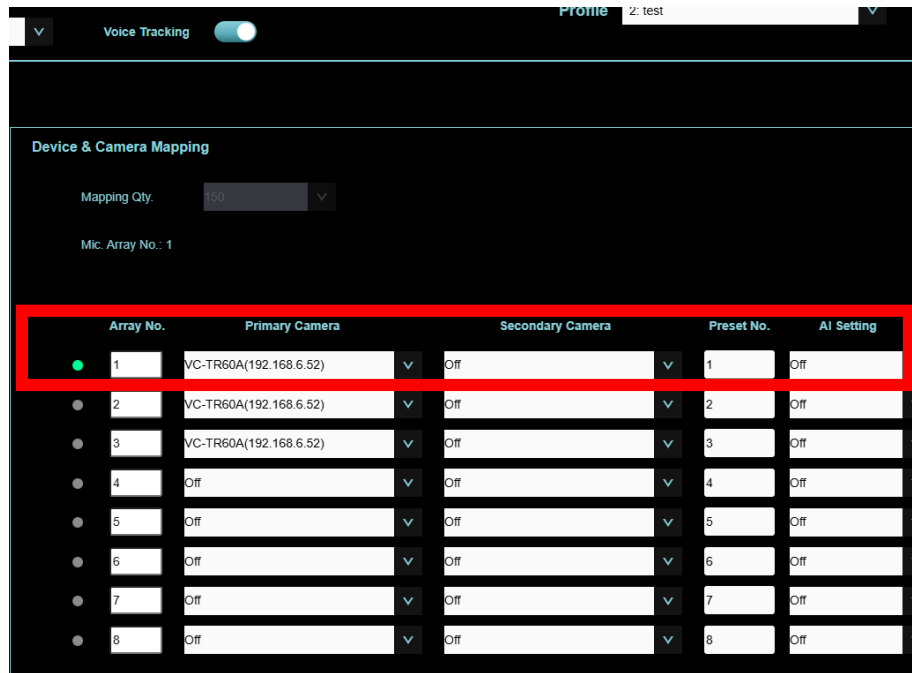

Others

- Audio-Technica ATUC-50CU and CamConnect Pro should connect to the same switch in same LAN.
- A maximum 150 Microphones can be supported.
- Do not place microphones less than 1m apart from each other in “All Voice” mode.
- Read carefully about Audio-Technica ATUC-50CU installation guide.
- Contact Lumens for technical support if any of above guide is unclear.

Thank You!



MyLumens.com



Contact Lumens

