

OIP-N40E Bridge

User Manual - English



[Important]


To download the latest version of Quick Start Guide, multilingual user manual, software, or driver, etc., please visit Lumens <https://www.MyLumens.com/support>

Table of Contents


Chapter 1	Package Contents	2
Chapter 2	Product Installation	3
2.1	I/O Interface.....	3
2.2	Product Installation	3
2.3	Description of Indicator Display	4
Chapter 3	Product Operation	5
3.1	Operating using the rocker switch.....	5
3.2	Operate via webpages	5
Chapter 4	Product Application and Connection.....	6
4.1	Signal Source Transmission	6
4.2	USB Camera Extension over network (OIP-N40E/OIP-N60D required)..	7
Chapter 5	Setting Menu	9
Chapter 6	Webpage Interface.....	10
6.1	Connecting to Internet	10
6.2	Log into the webpage	10
6.3	Webpage Menu Description.....	11
Chapter 7	Troubleshooting	25
Chapter 8	Safety Instructions	26
	Copyright Information.....	27

Chapter 1 Package Contents

OIP-N40E




USB 2.0 cable (1.8 M)
(Type A Type C)



Locking metal plate (x2)




M3 metal plate screw (4x4)



Chapter 2 Product Installation

2.1 I/O Interface


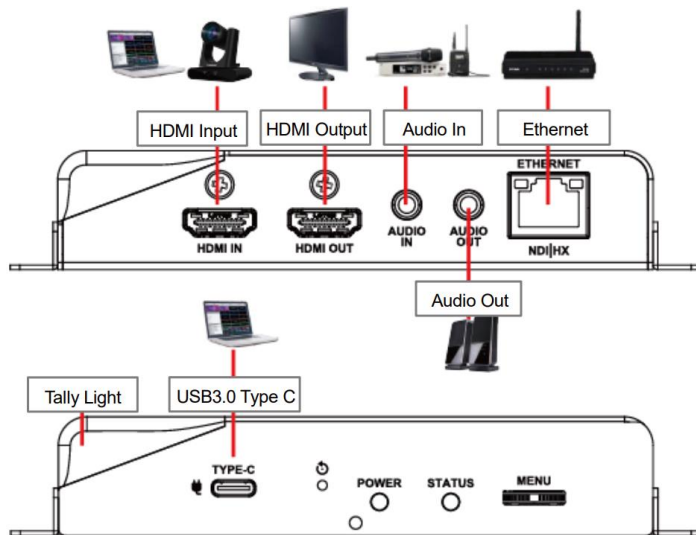


Note We recommended using high-performance USB-C cables (10Gbps or higher)

2.2 Product Installation


Using the accessory metal plates

1. Lock the accessory metal plate with screws (M3 x 4) to the lock holes on both sides of the OIP Bridge
2. Screw the metal plate to the desk or other surface as required.

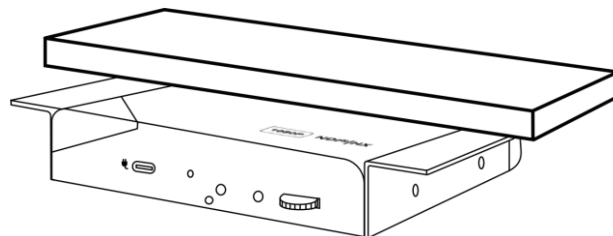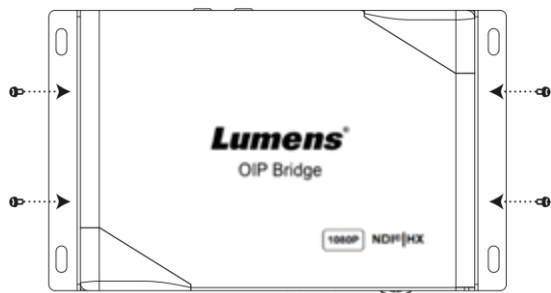

Tripod mounting

The camera can be mounted on a 1/4" -20 UNC PTZ tripod deck by using the lock holes on the side for the tripod of OIP-N40E

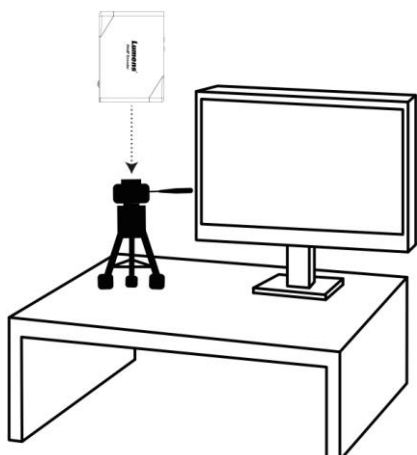


2.3 Description of Indicator Display

Power Status	Tally Status	Power	Standby	Tally
Startup in progress (initialization)	-	Red light	-	Flickering Red/Green light
In use	Signal	Red light	Green light	-
	No Signal			-
	Preview			Green light
	Program			Red light

Chapter 3 Product Operation

3.1 Operating using the rocker switch

Connect the HDMI OUT to the display, press the Menu dial to enter the OSD menu. Move the rocker switch to navigate the menu and adjust the parameters

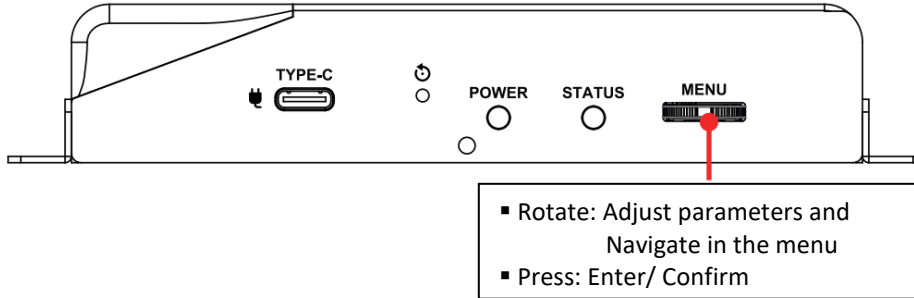

3.2 Operate via webpages

(1) Confirm the IP address

Refer to 3.1 Using the rocker switch, confirm the IP address in Status (If the OIP-N40E is directly connected to the computer, the default IP is 192.168.100.100. You need to manually set the computer's IP address in the same network segment.)

Encode	Input	Network	Status
IP Address :		192.168.4.147	
Netmask :		255.255.255.0	
Gateway :		192.168.4.254	
MAC ID :		dc:e2:ac:03:50:3	
HDMI Output :			
FW Version :		0IA0.00k	
			Exit

(2) Open the browser and input the IP address, e.g. 192.168.4.147, to access the login interface.



(3) Please enter the account/password to log in

- Account : admin
- Password : 9999

Chapter 4 Product Application and Connection

4.1 Signal Source Transmission

OIP-N40E can convert IP signal to USB or USB signals to IP.

Note: When using a USB connection to the OIP, a USB 3.1 Gen2 (10Gbps) cable is required.

(1) Connection Method

- Connect the OIP-N40E and the computer to the network switch using network cables, so that you can access the OIP-N40E webpage for configuration.



(2) USB Output (IP to USB)

Enable the Virtual USB Output to display the UVC image from an IP camera on a computer.

[System] - [Output] – [Virtual USB Output]


[Source] list > Connect camera > Press [Play] to display image



(3) HDMI Output Pass-through (HDMI / DP to HDMI)

Connect the HDMI or DP source to the OIP-N40E HDMI IN/USB-C port, then connect the OIP-N40E HDMI OUT port to a HDMI display, so that the image can pass-through.

[Stream] > [Source] > [Select HDMI / DP / Auto]

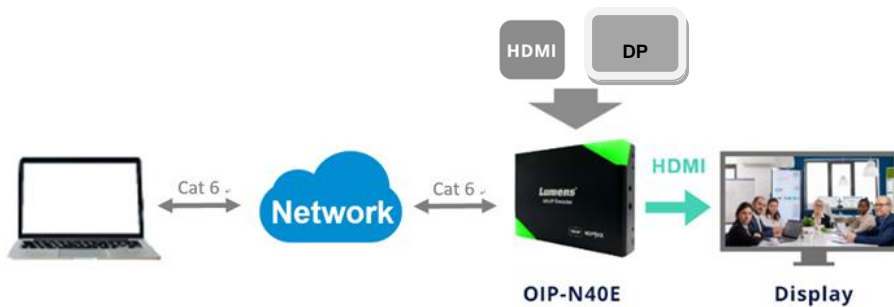

(4) Stream Output (HDMI to IP)

Connect the HDMI source to the OIP-N40E HDMI IN port, then output the stream using the selected streaming protocol.

[Stream] > [Stream Type] > [NDI / RTSP / RTMP / Dante]

[Stream] > [Source] > [Select HDMI source]



(5) Stream output (USB-C to IP)

Connect the DP supported computer to the OIP-N40E USB-C port, then output the stream using the selected streaming protocol.

*[Stream] > [Stream Type] > [NDI / RTSP / RTMP / Dante]
[Stream] > [Source] > Select [DP source]*



4.2 USB Camera Extension over network (OIP-N40E/OIP-N60D required)

OIP supports network bridging. Use the OIP-N40E with the OIP-N60D to extend the range of USB cameras over the local area network.

Note: When using a USB connection to the OIP, a USB 3.1 Gen2 (10Gbps) cable is required.

(1) USB Webcam extension

- Connect the OIP-N40E with the OIP-N60D in the Source list.
- Connect the USB camera to the OIP-N60D using a USB-A cable
- Connect a computer to the OIP-N40E using a USB-C cable.

OIP-N60D: [System] > [Output] > Enable [USB Extender] and [Virtual USB]

OIP-N40E: [System] > [Output] > Connect the OIP-N60D in the [Extender Source List]

The USB camera image will be output to the computer through the OIP-N40E's USB output.



(2) USB Webcam extension + DP output


- Connect the OIP-N40E with the OIP-N60D in the Source list.
- Connect the USB camera to the OIP-N60D using a USB-A cable
- Connect a computer to the OIP-N40E using a USB-C cable

OIP-N60D: [System] > [Output] > Enable [USB Extender] and [Virtual USB]

OIP-N40E: [System] > [Output] > Connect the OIP-N60D in the [Extender Source List]

OIP-N40E: [Stream] > [Source] > [Select DP]

The computer can use the USB camera as the webcam and project the meeting live view to the HDMI display.

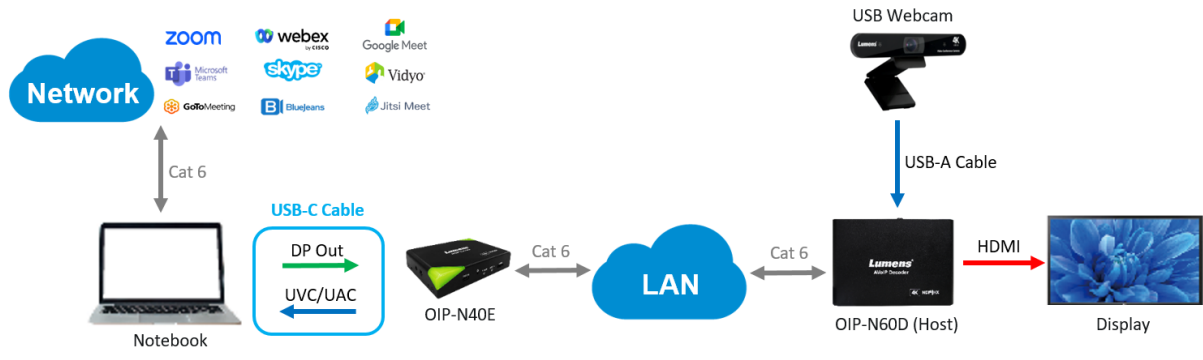

Chapter 5 Setting Menu

Using the rocker switch **[Menu]** enter the setting menu; the **bold underlined** values in the following table are defaults.

1st Level Major Items	2nd Level Minor Items	3rd Level Adjustment Values	Function Descriptions
Encode	Stream Type	<u>NDI HX</u> / RTSP / RTMP / RTMPS	Select the stream type
Input	HDMI-in From	<u>Auto</u> / HDMI/ DP	Select the input source
Network	IP Mode	Static/ <u>DHCP</u> / Auto	Dynamic Host Configuration
	IP Address	<u>192.168.100.100</u>	Configurable when set to Static
	Subnet mask (Netmask)	<u>255.255.255.0</u>	
	Gateway	<u>192.168.100.254</u>	
Status	-	-	Display the current machine status

Chapter 6 Webpage Interface


6.1 Connecting to Internet

Two common connection methods are shown below

1. Connecting via switch or router



2. To connect directly using a network cable, the IP address of the keyboard/computer should be changed and set as the same network segment.

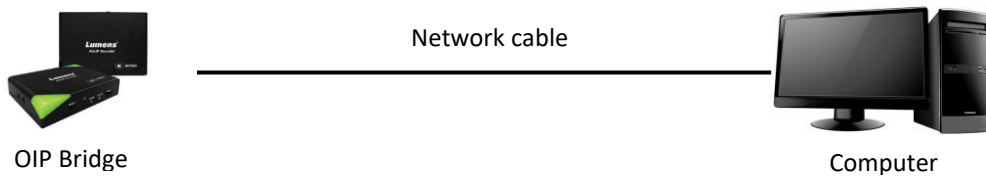


6.2 Log into the webpage

1. Open the browser, and enter the URL of OIP-N in the IP address bar

E.g.: <http://192.168.4.147>


2. Enter the administrator's account and password

Note For a first-time login, please refer to [6.3.8 System- User](#) to change the default password

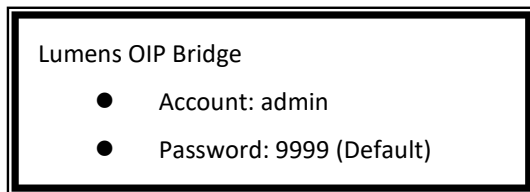

6.3 Webpage Menu Description

6.3.1 Dashboard

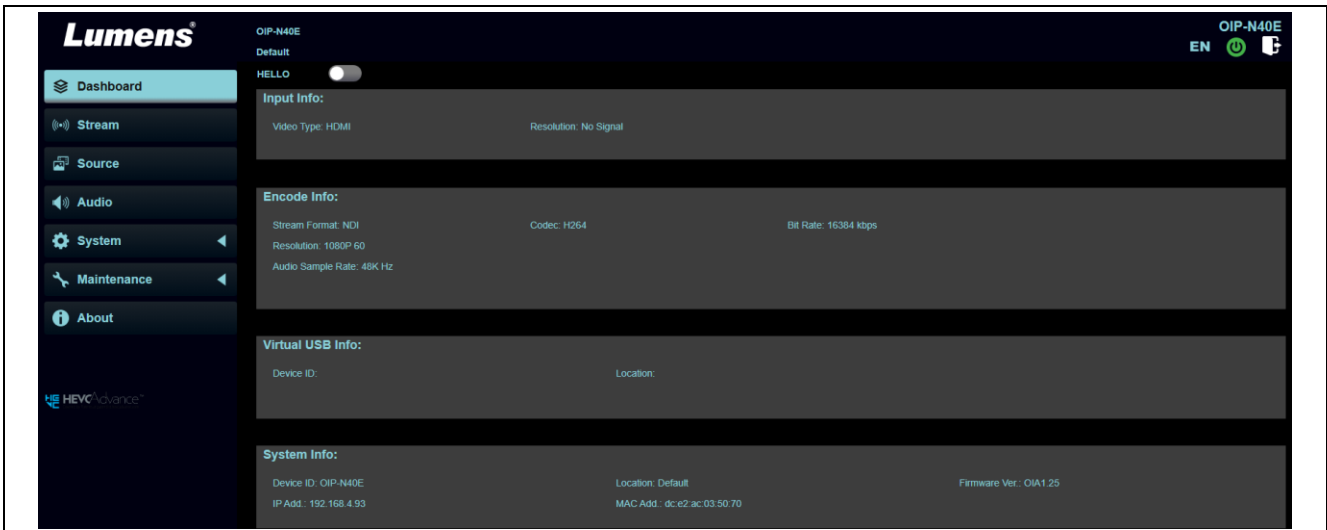


Function Descriptions


Display input, encode, virtual USB and system related information

HELLO: Enable this button to make the indicator light on the unit blink for one minute. It will then automatically turn off.

6.3.2 Stream

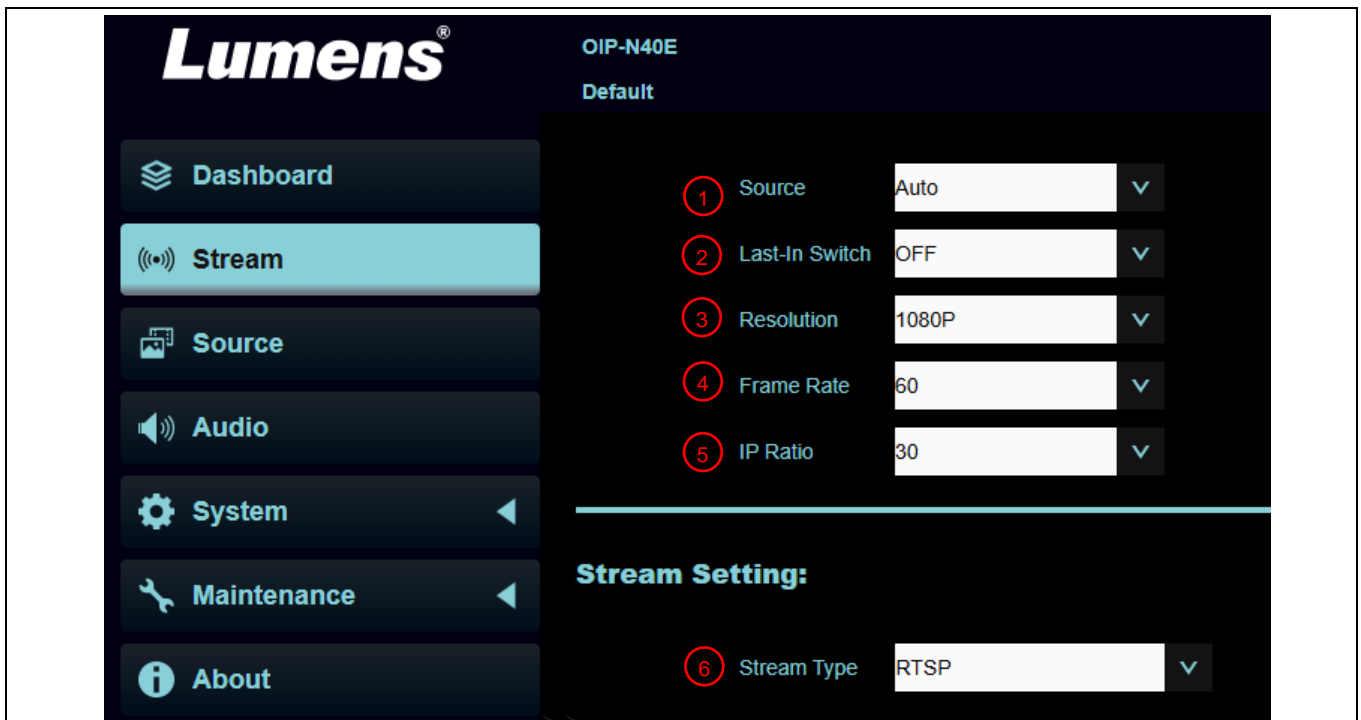


No	Item	Description
1	Source	Auto / HDMI / DP
2	Last In Switch	Automatically switches the output to the designated source when other sources lose signal.

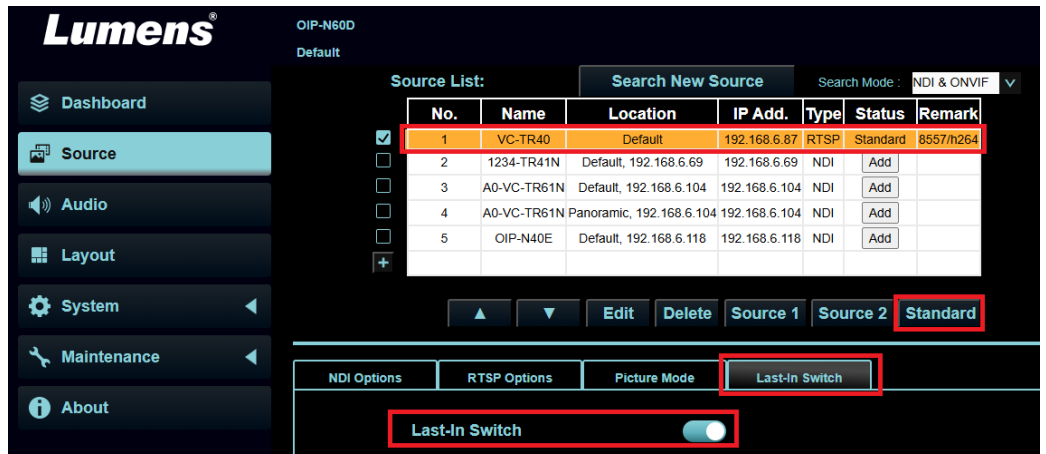



Assign an OIP-N40E as the Standard Source in the OIP-N60D web interface.


If any other input source loses signal, the OIP-N60D automatically switches to the designated Standard Source, ensuring continuous output and minimizing interruptions.

3	Resolution	1080P / 720P
4	Frame Rate	60 / 59.94 / 50 / 30 / 29.97 / 25
5	IP Ratio	10 / 15 / 20 / 25 / 30 / 60
6	Stream Type	NDI HX / RTSP / RTMP / RTMPS / Dante AV-H (After activating the Dante license)

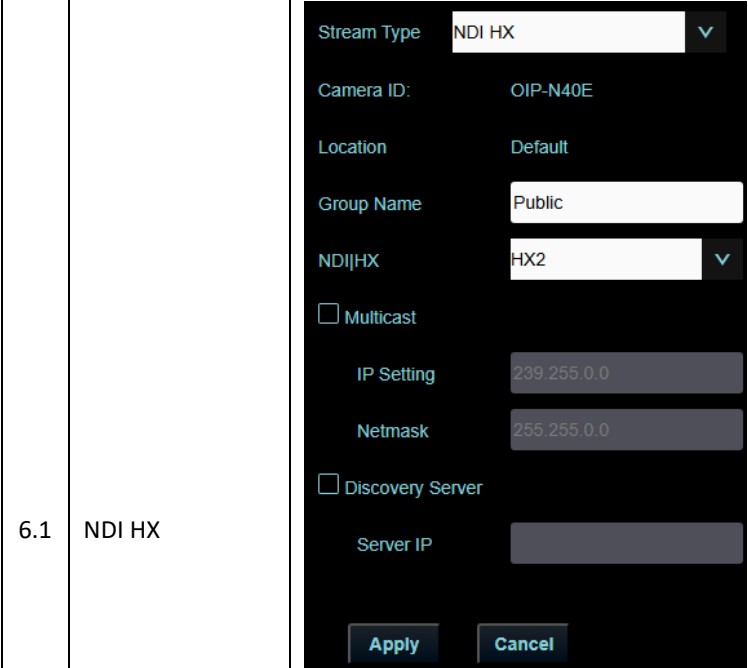


- Camera ID/Location: Name/Location display according to System Output settings
 - Group Name: The group name can be modified here and set with Access Manager - Receive in NDI Tool
 - NDI|HX: HX2/HX3 is supported
 - Multicast: Enable/Disable Multicast
- Note** It is suggested to enable Multicast when the number of users online watching the live image simultaneously is more than 4
- Discovery Server: Discovery service. Check to enter the Server IP address

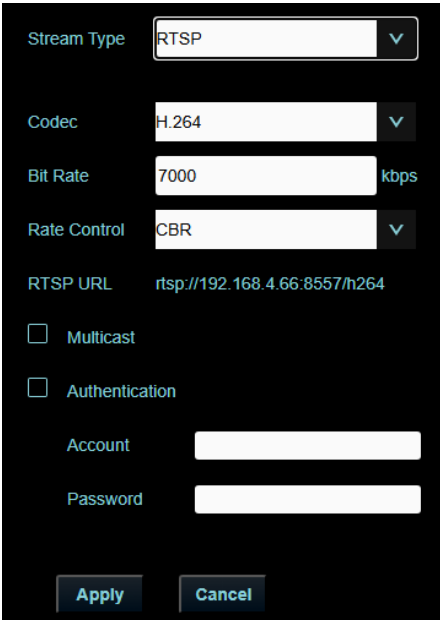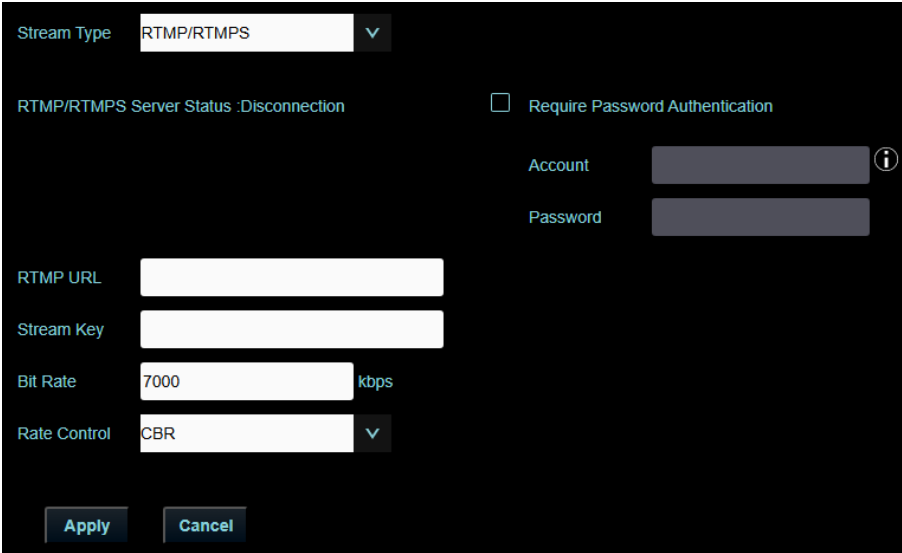5.2	RTSP/ RTSPS	 <p>Stream Type: RTSP</p> <p>Codec: H.264</p> <p>Bit Rate: 7000 kbps</p> <p>Rate Control: CBR</p> <p>RTSP URL: rtsp://192.168.4.66:8557/h264</p> <p><input type="checkbox"/> Multicast</p> <p><input type="checkbox"/> Authentication</p> <p>Account: _____</p> <p>Password: _____</p> <p>Apply Cancel</p> <ul style="list-style-type: none"> ▪ Codec (Encode Format): H.264/HEVC RTMP/ RTMPS only support H.264 ▪ Bit Rate: Setting range 2,000 ~ 20,000 kbps ▪ Rate Control: CBR/VBR ▪ RTSP URL: Output the image with RTSP URL ▪ Multicast: Enable/Disable Multicast <p>When the number of users online watching the live image simultaneously is more than 4.</p> <ul style="list-style-type: none"> ▪ Authentication: Enable/Disable Username/Password Authentication <p>The username/password is the same as the webpage login password, please refer to 6.1.10 System- User to add/modify account information</p>
5.3	RTMP/RTMPS	 <p>Stream Type: RTMP/RTMPS</p> <p>RTMP/RTMPS Server Status :Disconnection</p> <p><input type="checkbox"/> Require Password Authentication</p> <p>Account: _____ ⓘ</p> <p>Password: _____</p> <p>RTMP URL: _____</p> <p>Stream Key: _____</p> <p>Bit Rate: 7000 kbps</p> <p>Rate Control: CBR</p> <p>Apply Cancel</p> <ul style="list-style-type: none"> ▪ RTMP URL: Enter the RTMP URL ▪ Stream Key: Enter the Stream Key ▪ Bit Rate: 2,000 ~ 20,000 kbps ▪ Rate Control: Choose from CBR / VBR ▪ Required Password Authentication: Enable / Disable authentication

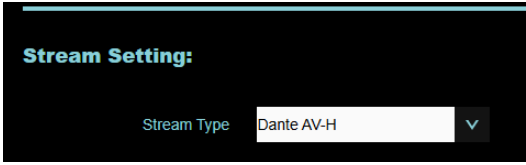5.4	Dante AV-H (After activating the Dante license)	 <p>Choos Dante AV-H to output Dante (After activating the Dante license)</p>
-----	--	--

6.3.3 Source

< The source section can only be accessed when the *Virtual USB* in the *System – Output* section is enabled.>

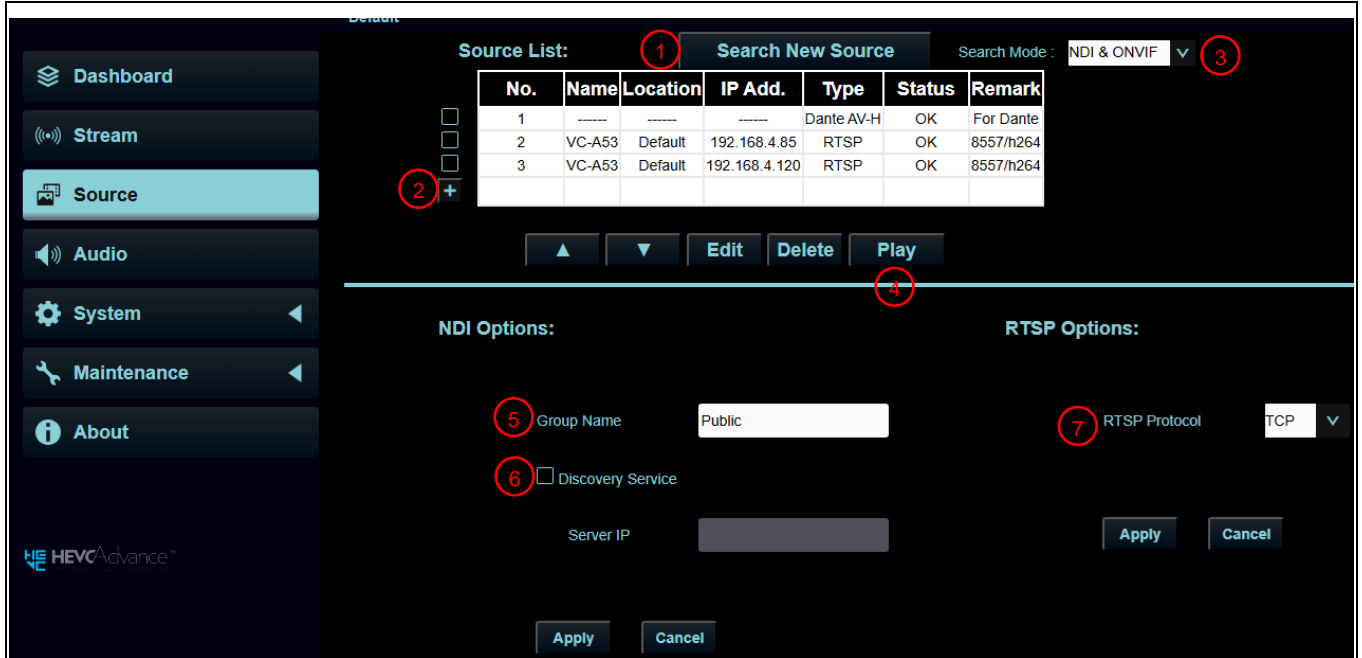


The screenshot shows the 'Source List' interface. It includes a search bar (1), search mode dropdown (3), a table of sources, a '+Add' button (2), and configuration options for NDI and RTSP. The table lists three sources: Dante AV-H, VC-A53, and another VC-A53. The configuration section includes fields for Group Name (5), Discovery Service (6), and RTSP Protocol (7).

No	Item	Description
1	Search New Source	Click to search for devices in the same network segment and display them in the list
2	+Add	Manually add a device
3	Search Mode	Search from NDI&ONVIF, only NDI, and only ONVIF
4	Play	Select a device, click to play
5	Group Name	The group name can be modified here and set with Access Manager - Receive in NDI Tool

6	Discovery Service	Discovery service. Select to enter the Server IP address
7	RTSP Options	Choose from TCP and UDP

Dante controller (For Dante-enabled models only)

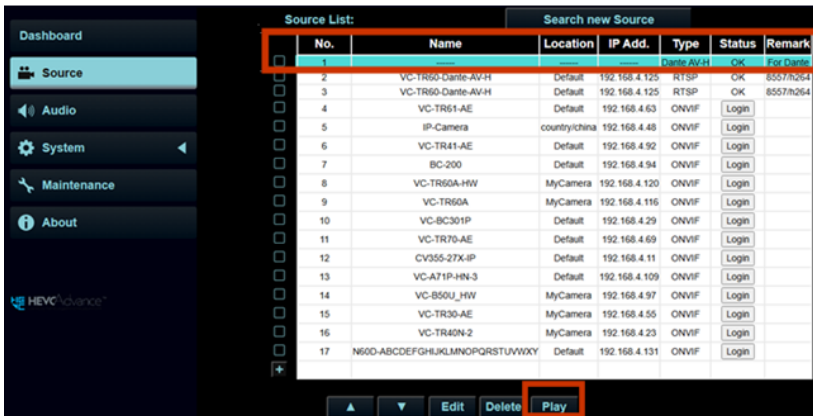



To ensure the unit OIP unit can be recognized by the Dante Controller after enabling the Dante function, please follow the steps below:


1. Access the unit's web page
2. Navigate to the [Source] section
3. Select [Dante AV-H] as the source
4. Click [Play] to activate the stream

Remark: If the play button is not activated, the device will not be detected properly by the Dante Controller.


6.3.4 Audio

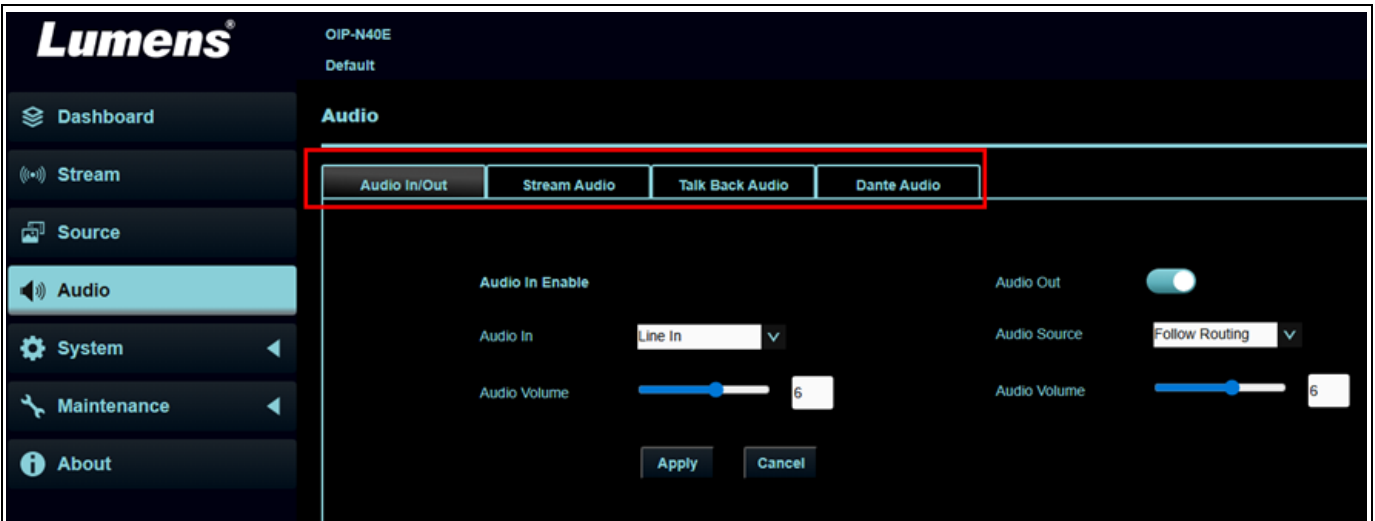

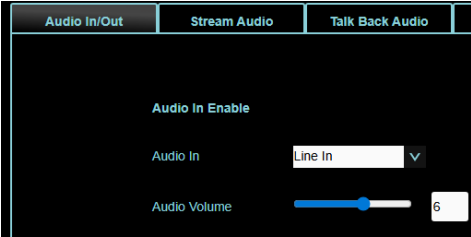No	Item	Description
1	Audio In / Out	<ul style="list-style-type: none"> ▪ Audio In: Select Line in or Mic in  <ul style="list-style-type: none"> ▪ Audio Out: Enable or disable the audio output port.

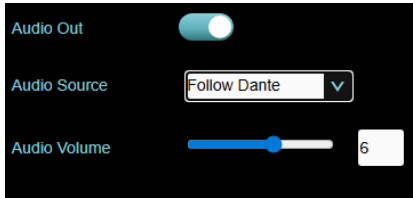

The 3.5 mm output port can be connected to devices such as earphones or speakers



▪ **Source of the Audio Output port:**

- Follow **Stream**: Output the sound of the device you connected in the N40E Source section.



- Follow **Dante**: Output the sound from a Dante device you connected with Dante Controller.



- Follow **Routing**: Output audio from the OIP-N60D's audio input.




<The Follow Routing function can only be achieved by connecting the OIP-N60D and OIP-N40E using the Lumens Routing Switcher software.>

● Follow ● Routing ● Talkback ● Monitoring

		Monitoring	★ OIP-N60D-Dante-AV-H 192.168.6.90
Follow HDMI			
Monitoring			
★	OIP-N40E	192.168.6.103	●
Audio In			


▪ **Audio Volume:** 0~10



▪ **Stream Audio:** Enable or disable audio output.

▪ **Audio Source for streaming:** Select which audio input you want to output with streaming:


- **HDMI / DP In:** Outputs audio from the device connected to the HDMI IN or DP IN port.



- **Audio In:** Outputs audio from a device such as cellphone connected to the 3.5mm audio input on the N40E.




- **USB Audio:** Outputs sound from a device such as a laptop connected via USB.



▪ **Encode Sample Rate:** 48KHz

Audio Output Stream Type


Select the protocol used to transmit audio:

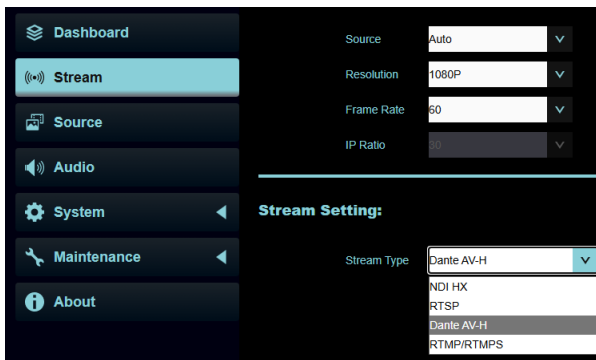

1. NDI HX
2. RTSP
3. Dante AV-H (After activating the Dante license)
4. RTMP / RTMPS

The selected audio source above in *Stream Audio* section will be transmitted through the output type you choose in the Stream Setting section.

Ex.

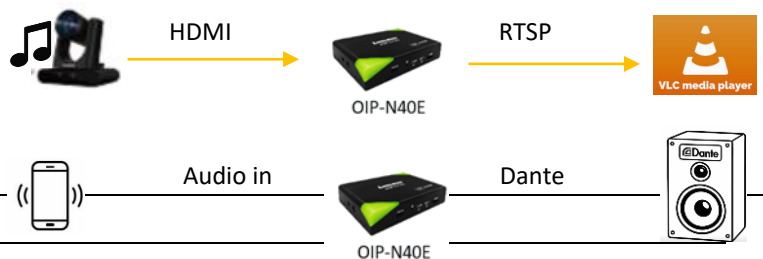




USB Audio





OIP-N40E

Dante

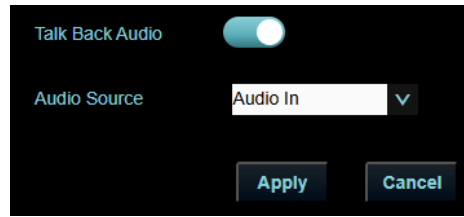

▪ Talk Back Audio: Enable or disable Talk Back

After connecting the OIP-N60D and OIP-N40E using the Lumens Routing Switcher software (see the screenshot below), the Talk Back function enables two-way audio communication, allowing each device's input to be routed to the other device's output.

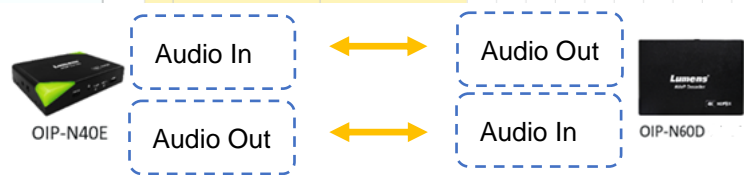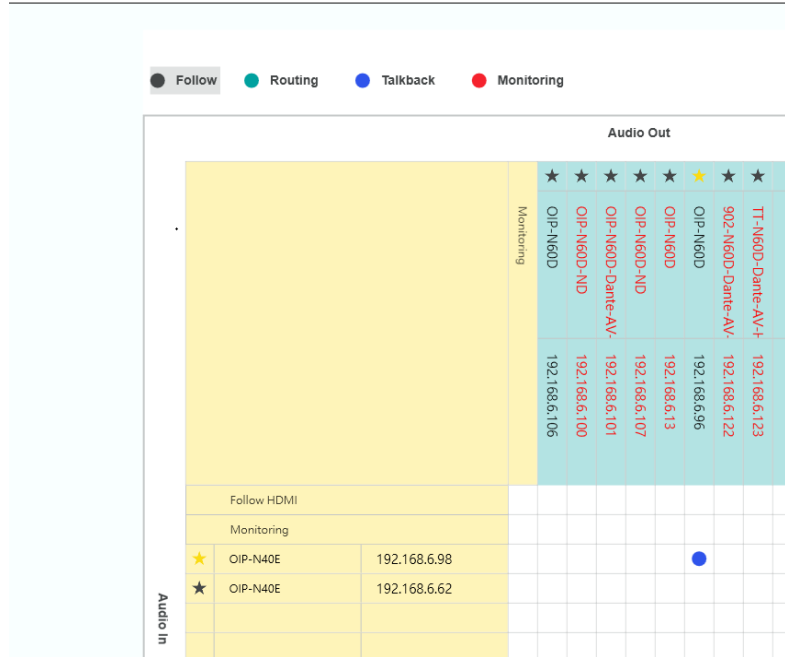


▪ Audio Source:


- Audio in: Outputs audio from a device connected to the 3.5mm audio input on the N40E.
- USB Audio: Outputs sound from a device such as a laptop connected via USB.

3

Talk Back Audio


4	Dante Audio (After activating the Dante license)	 <ul style="list-style-type: none"> ▪ Dante Audio: Enable or disable Dante ▪ Audio Source: <ul style="list-style-type: none"> - HDMI / DP: Outputs audio from the device connected to the HDMI IN or DP IN port. - Audio in: Outputs audio from a device connected to the 3.5mm audio input on the N40E. - USB Audio: Outputs sound from a device such as a laptop connected via USB. ▪ Encode Sample Rate: 48KHz
---	---	---

6.3.5 System- Output

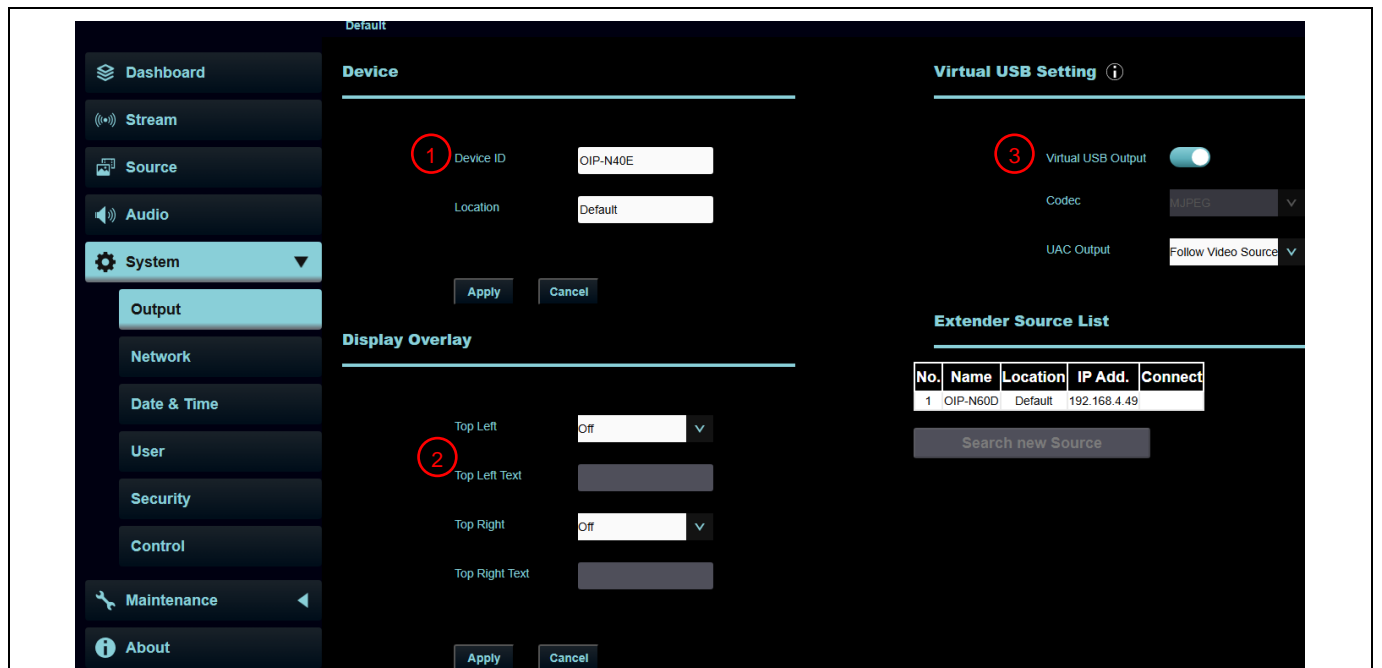


No	Item	Description
1	Device ID/ Location	Device Name/Location <ul style="list-style-type: none"> ▪ The name is limited to 1 - 12 characters ▪ The location is limited to 1 - 11 characters ▪ Please use uppercase and lowercase letters or numbers for characters. Special symbols such as “/” and “space” cannot be used <div style="border: 1px solid gray; padding: 2px; width: fit-content;">Note</div> Modifying this field will modify the Onvif device name/location.
2	Display Overlay	Customize the position of the “date and time”, or “custom content”, to display in the top left or top right corner of the output.
3	Virtual USB Setting	Virtual USB output: Enable / Disable Codec: MJPEG UAC Output: OFF / Follow Video source / Follow Dante / Follow Routing
4	Extender Source List	Display the available extender source devices in the network.

6.3.6 System- Network

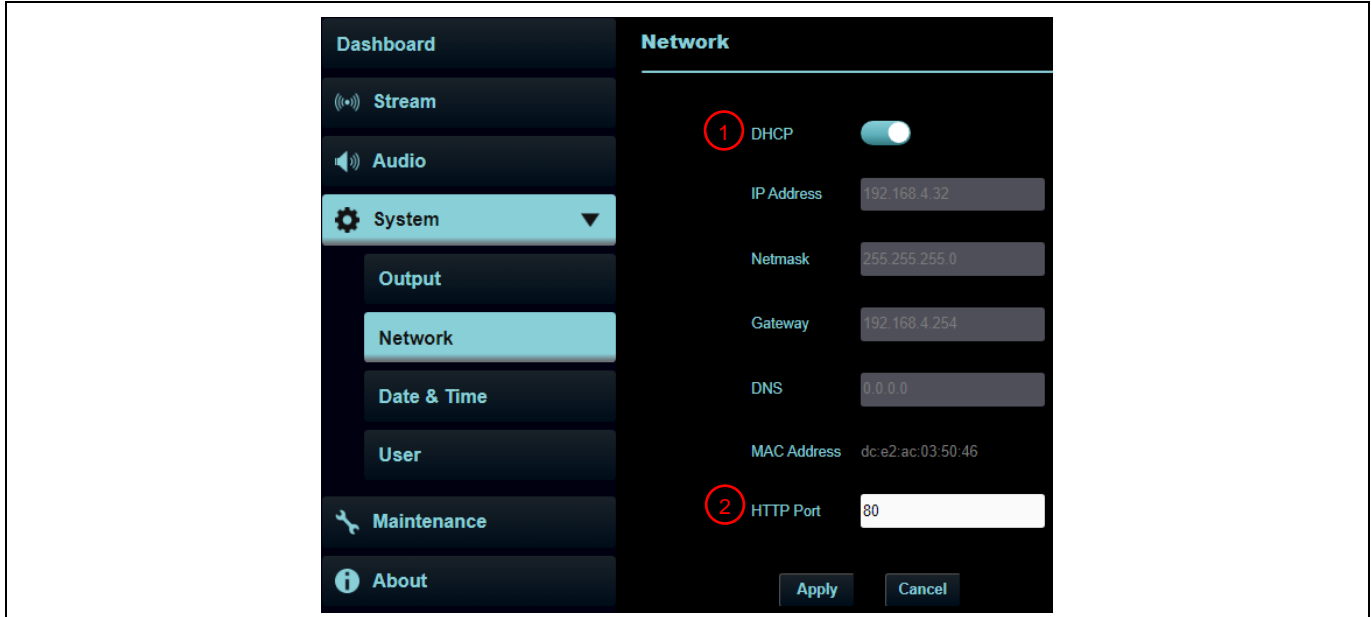

No	Item	Description
1	DHCP	Ethernet setting for OIP Bridge. Change of setting is available when DHCP function is disabled.
2	HTTP Port	Set HTTP port. The default Port value is 80

6.3.7 System- Date & Time

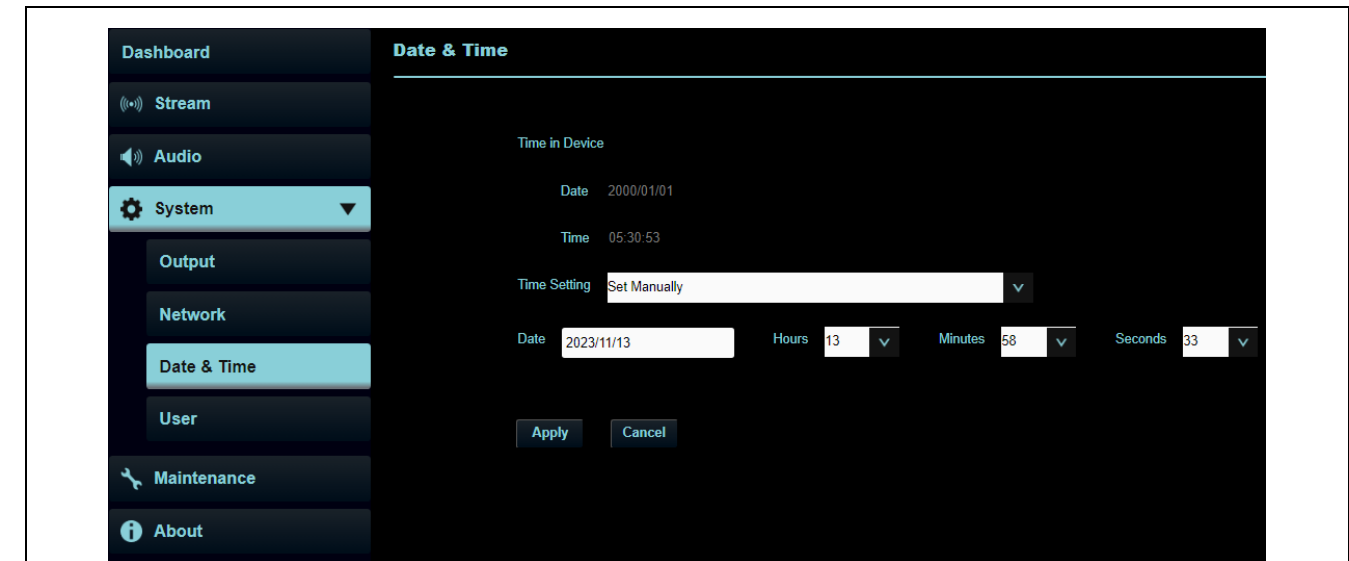

Function Descriptions

Display the current device/computer date and time, and set the display format and synchronization method
 When Manually Set is selected for [Time Settings], Date & Time can be customized

6.3.8 System- User



Function Descriptions


Add/Modify/Delete user account

- Supporting 4 - 32 characters for user name and password
- Please use uppercase and lowercase letters or numbers for characters. Special symbols or the underlined cannot be used
- Authentication Mode: Set the new account management permissions

User Type	Admin	Viewer
View	V	V
Setting/Account management	V	X

※When Factory Reset is executed, it will clear the user's data

6.3.9 System - Security

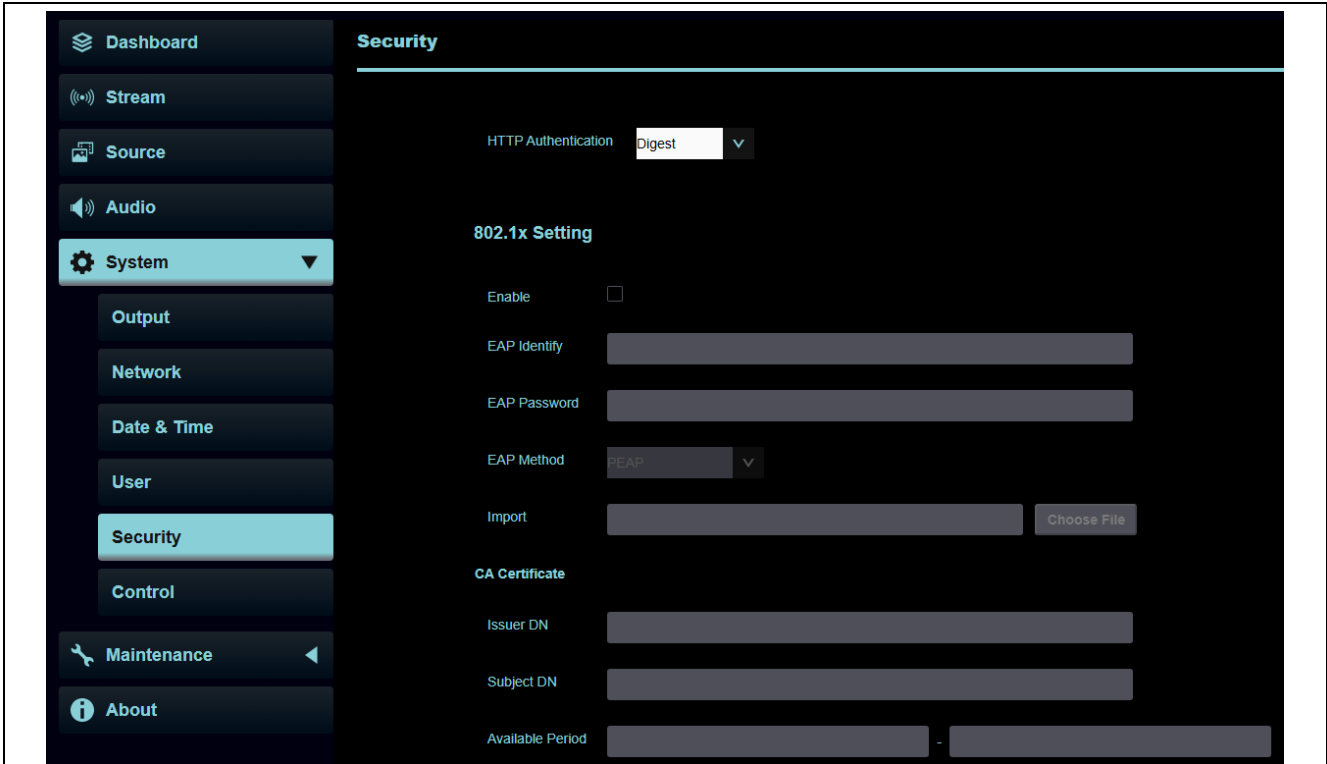


Function Descriptions

HTTP Authentication: Choose from Digest / Basic / Off

802.1x Setting: Enable / Disable

6.3.10 System - Settings

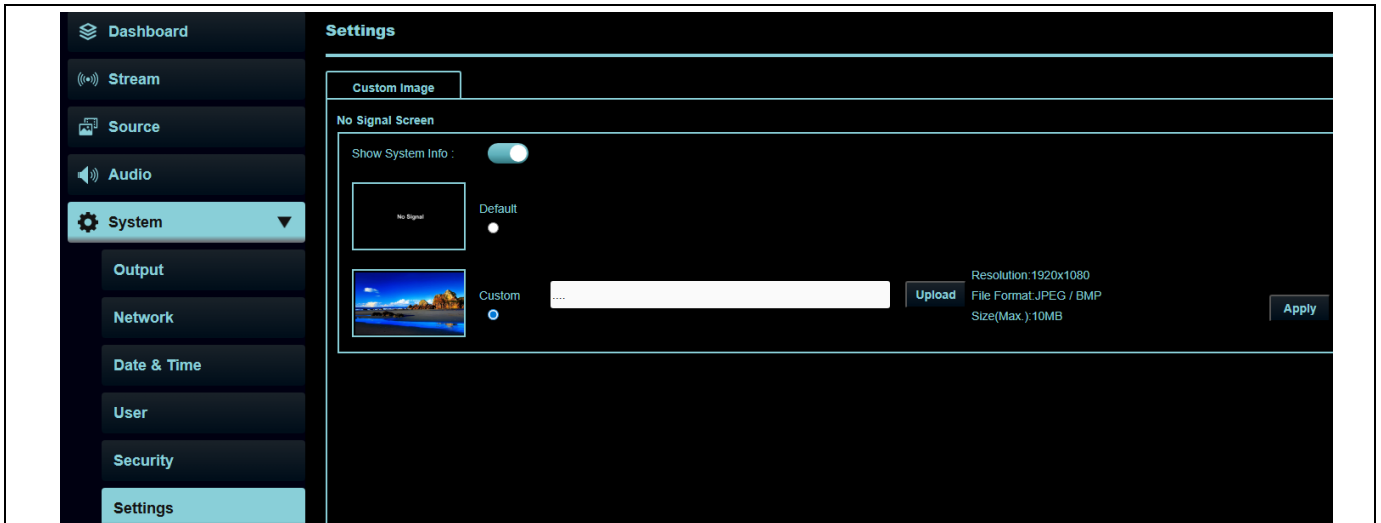


Functions Description

The user can upload a custom image (JPEG / BMP) to be displayed as the background when no signal is detected. Select [...] to locate your image, then click Upload and Apply to save it.


System Information: Enable this option to display product details such as the IP address and firmware version on the monitor.

6.3.11 Maintenance - Update

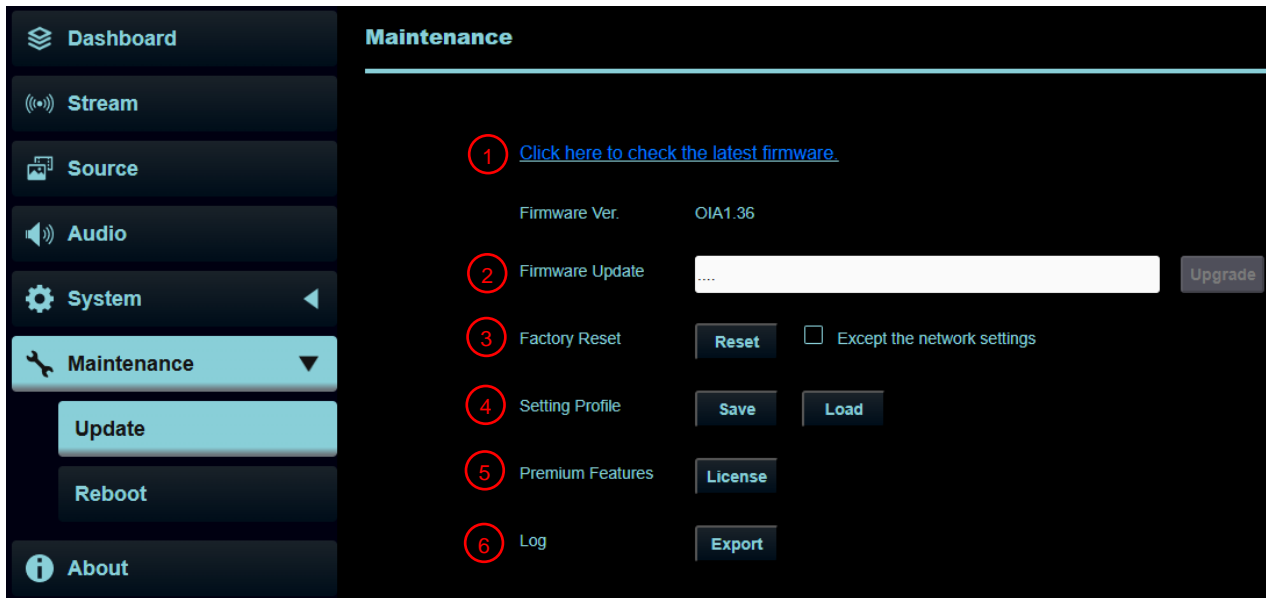

No	Item	Description
1	Firmware link	Click on the link to the Lumens website and enter the model to obtain the latest firmware version information
2	Firmware Update	Select the downloaded firmware file, and click [Upgrade] to update the firmware <div style="border: 1px solid gray; padding: 2px; margin-bottom: 5px;">Note Update takes about 2 - 3 minutes</div> <div style="border: 1px solid gray; padding: 2px;">Note Please do not operate or turn off the power of the device during the update to avoid firmware update failure</div>
3	Factory Reset	Reset all configurations to factory default settings
4	Setting Profile	Save setup parameters. Users can save and load device setup parameters
5	Premium Features	Advanced feature available through license activation.
6	Log	Export the log file containing the records from the recent period.


6.3.12 Maintenance – Reboot

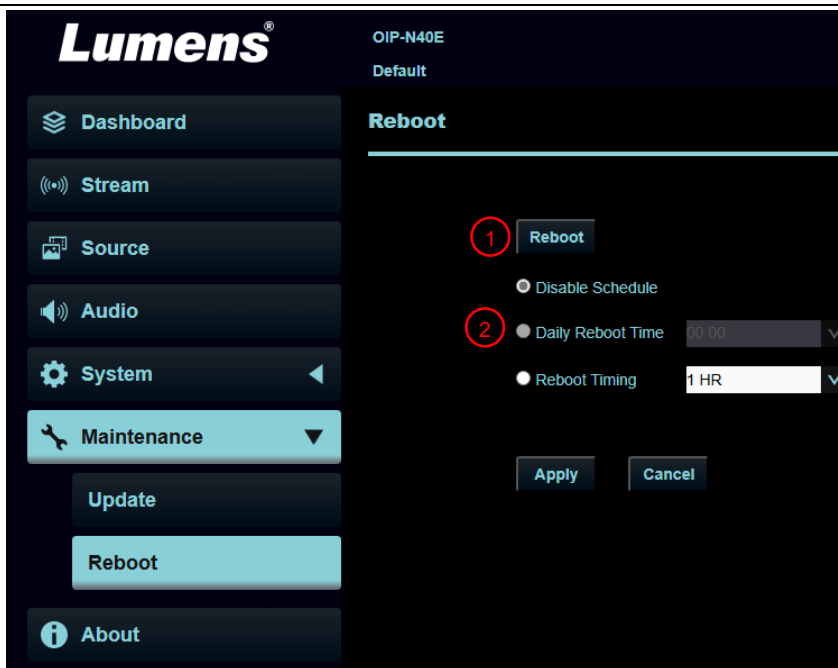

No	Item	Description
1	Reboot	Click the button to reboot the unit

2	Schedule Reboot	<p>Disable Schedule: Turn off the schedule reboot function.</p> <p>Daily Reboot Time: Set the exact time the unit will automatically reboot. (Can only be enabled when SNTP is selected in the Time Setting section.)</p> <p>Reboot Timing: Set the reboot interval, from 1 to 24 hours.</p>
---	-----------------	--

6.3.13 About

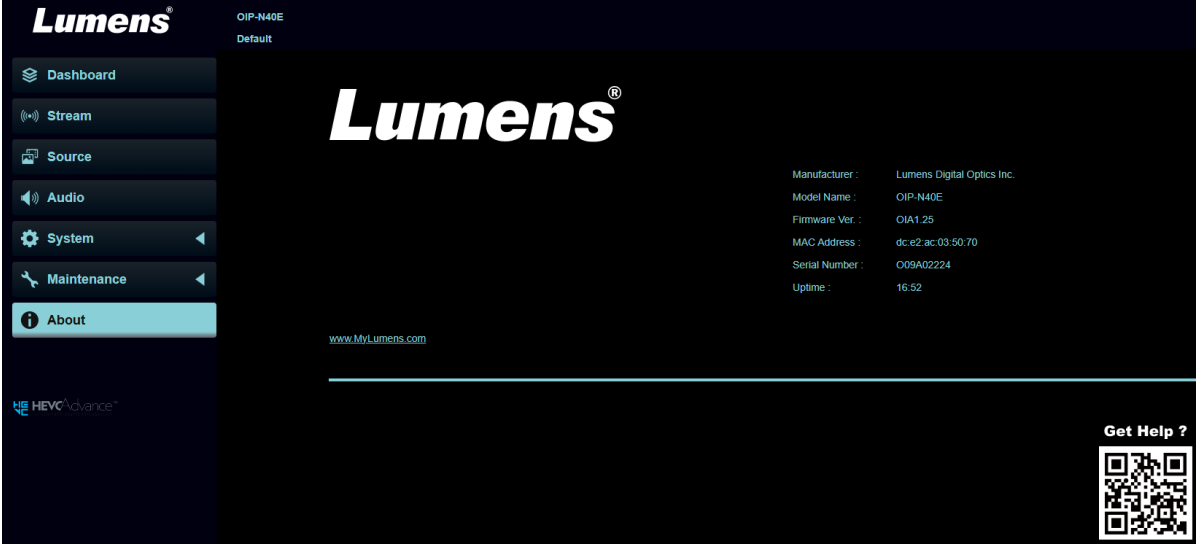

Function Descriptions

Display the firmware version, serial number, and other related information of the OIP Bridge

For technical support, please scan the QR Code at the bottom right for assistance

Chapter 7 Troubleshooting

This chapter describes problems you may encounter while using OIP Bridge. If you have questions, please refer to related chapters and follow all the suggested solutions. If the problem still occurs, please contact your distributor or the service center.

No.	Problems	Solutions
1.	OIP-N40E cannot display the signal source screen	<ol style="list-style-type: none"> 1. Confirm that the cables are fully connected. Please refer to Chapter 4, Product Application and Connection 2. Confirm that the input signal source resolution is 1080p or 720p 3. Confirm that USB-C cables are recommended to use specifications with a transmission rate of 10Gbps or higher
2.	OIP-N40E webpage USB extender cannot find OIP-N60D on the same network segment	<ol style="list-style-type: none"> 1. Confirm that the OIP-N60D has enabled the USB extender function 2. Confirm that the management switch in the network has disabled the blocking of multicast packets
3.	Recommended specifications for USB-C cables	Transfer rate of 10 Gbps or higher
4.	Recommended Switch Configuration	<p>When using OIP-N products with a network switch, it is recommended to configure the following settings:</p> <ol style="list-style-type: none"> 1. Select a switch where every port supports 1Gbps transmission 2. Use a switch that supports QoS (Quality of Service) with 4 queues and strict priority; QoS should be enabled when both 100Mbps and 1Gbps devices exist in the same local network 4. Enable IGMP Snooping 5. It is recommended to choose a managed switch (Layer 2 or above) 6. It is advisable to disable EEE (Energy Efficient Ethernet) or similar power-saving features

Chapter 8 Safety Instructions

Always follow these safety instructions when setting up and using the Document Camera:

1 Operation

- 1.1 Please use the product in the recommended operating environment, away from water or source of heat
- 1.2 Do not place the product on a tilted position or unstable trolley, stand or table.
- 1.3 Please clean the dust on the power plug prior to usage. Do not insert the product's power plug into a multiplug to prevent sparks or a fire.
- 1.4 Do not block the slots and openings in the case of the product. They provide ventilation and prevent the product from overheating.
- 1.5 Do not open or remove covers, otherwise it may expose you to dangerous voltages and other hazards. Refer all servicing to licensed service personnel.
- 1.6 Unplug the product from the wall outlet and refer servicing to licensed service personnel when the following situations happen:
 - If the power cords are damaged or frayed.
 - If liquid is spilled into the product or the product has been exposed to rain or water.

2 Installation

- 2.1 For security considerations, please make sure the standard hanging rack you bought is in line with UL or CE safety approbations and installed by technician personnel approved by agents.



3 Storage

- 3.1 Do not place the product where the cord can be stepped on as this may result in fraying or damage to the lead or the plug.
- 3.2 Unplug the product during thunderstorms or if it is not going to be used for an extended period.
- 3.3 Do not place the product or accessories on top of vibrating equipment or heated objects.

4 Cleaning

- 4.1 Disconnect all the cables prior to cleaning and wipe the surface with a dry cloth. Do not use alcohol or volatile solvents for cleaning.

■ Precautions

	This symbol indicates that this equipment may contain dangerous voltage which could cause electric shock. Do not remove the cover (or back). No user-serviceable parts inside. Refer servicing to licensed service personnel.		WARNING
			This symbol indicates that there are important operating and maintenance instructions in this User Manual with this unit.

■ Battery Warning (for products or accessories with batteries)

General Safety Warnings:

- Do not heat or dispose of the battery in fire, as it may explode or leak.
- Avoid short-circuiting: Do not connect the positive and negative terminals directly or use metallic objects to connect them.
- Do not disassemble, crush, puncture, or modify the battery.
- Do not immerse the battery in water or any other liquids.

Usage and Storage Warnings:

- Do not store the battery in high-temperature environments (above 60°C) or in areas with high humidity.
- Keep away from direct sunlight and heat sources.
- If not in use for a long period, remove the battery and store it in a cool, dry place.

Disposal and Recycling Warnings:

- Do not dispose of the battery in household waste; follow local regulations for proper disposal and recycling.
- If leakage occurs, avoid contact with the leaked substance and clean the affected area immediately.

Child Safety Warnings:

- This product contains a button battery. Ingestion of a button battery can cause severe internal burns within 2 hours and may result in death.
- If a battery is swallowed or if internal battery material is contacted, seek medical attention immediately.
- Store batteries (whether new or used) in a place that is out of reach of children.
- If the battery compartment does not close securely, stop using the product and keep it away from children.

■ FCC Warning

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

Notice :

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

■ IC Warning

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus as set out in the interference-causing equipment standard entitled "Digital Apparatus," ICES-003 of Industry Canada.
 Cet appareil numérique respecte les limites de bruits radioélectriques applicables aux appareils numériques de Classe A prescrites dans la norme sur le matériel brouilleur: "Appareils Numériques," NMB-003 édictée par l'Industrie.

■ EN55032 CE Warning

Operation of this equipment in a residential environment could cause radio interference.

Copyright Information

Copyrights © Lumens Digital Optics Inc. All rights reserved.

Lumens is a trademark that is currently being registered by Lumens Digital Optics Inc.

Copying, reproducing or transmitting this file is not allowed if a license is not provided by Lumens Digital Optics Inc. unless copying this file is for the purpose of backup after purchasing this product.

In order to keep improving the product, the information in this file is subject to change without prior notice.

To fully explain or describe how this product should be used, this manual may refer to names of other products or companies without any intention of infringement.

Disclaimer of warranties: Lumens Digital Optics Inc. is neither responsible for any possible technological, editorial errors or omissions, nor responsible for any incidental or related damages arising from providing this file, using, or operating this product.