


1. Product connection

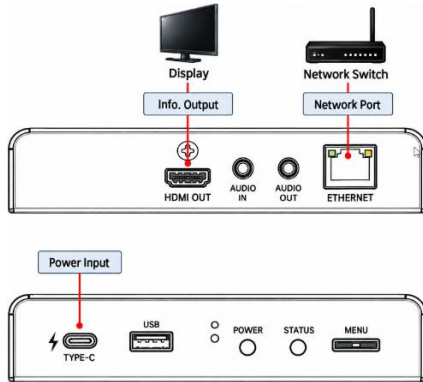

- Ethernet: Supports PoE (IEEE 802.3af) power supply.
- HDMI Output: Displays the firmware version and IP address only.
No other information or display functions are supported.
- Audio In / Audio Out: Not supported.
- USB Type-C: For power supply only. No other functions are supported.
- USB Type-A: Not supported.


2. Instruction for Installation

■ Using the accessory metal plates

- (1) Lock the accessory metal plate with screws (M3 x 4) to the lock holes on both sides of the OIP-N60C




- (2) Install the metal plate and OIP-N60C under the table according to the spatial area

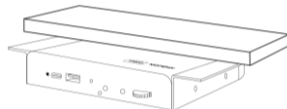

■ Use tripod

The camera can be mounted on a 1/4" - 20 UNC PTZ tripod deck by using the lock holes on the side for the tripod of OIP-N60C



3. Web Interface Login

3.1 Confirm the IP address

Connect the device' s HDMI OUT to a display. The device' s IP address will be shown on the display.



- 3.2 Open the browser and input the IP address, e.g. 192.168.4.147, to access the login interface.

192.168.4.147

- 3.3 Please enter the account / password to log in

Account : admin

Password : 9999

※ For questions about the installation, please scan the QR Code.

A support person will be assigned to assist you.



Get Help ?