## **PS752** Desktop Document Camera

## Lumens

The Lumens<sup>™</sup> PS752 document camera has 20x zoom capability and a professional image sensor to deliver vivid colors at Full HD 1080p output resolution with 30 fps. The PS752 supports HDMI input/output and it is compatible with several high definition audio/video equipment. The internal memory stores up to 240 images and is expandable with a USB flash drive (up to 4TB). With a one-touch audio/video recording function presentations are recorded without the need for a PC. A built-in backlight design achieves the multi-image display requirements. The dual adjustable side lamp design prevents reflections. Single-button auto-tune provides the perfect image quality every time. The unique projector mode is for connecting a LCD or DLP projector to reduce the interference caused by different types of projector technology, allowing the best image quality to be delivered.


#### **Key Features**

- Full HD 1080p output resolution with 30fps
- VGA, HDMI input and output and supports HDMI pass-through
- 20 times variable zoom ratio
- Built-in microphone
- One-Touch synchronous audio video recording
- Compatible with USB flash drives, expandable to 4TB
- Dual gooseneck side lamps for anti-reflection
- Full sized built-in LED backlight design for X-rays, film, and slides
- Folds down to a height of six inches (15 cm)
- Rigid lens provides protection from abnormal operation





#### **More Details**



#### **Excellent Image Quality**

The professional image sensor features low noise, high resolution, and vivid color reproduction and presents an excellent image quality even under insufficient light conditions.

### Annotation without PC

Lumens <sup>™</sup> has developed a PCfree solution, using a USB wired or wireless mouse to enable the image to be directly edited.





# Video/Audio Recording and Extra Storage

With the built-in microphone, and USB flash drive (up to 4TB), record and store video and audio synchronously without a PC.


#### Supports HDMI Passthrough

The PS752 is equipped with HDMI input and output. The HDMI input allows you to connect an input device like a notebook or iPad, while the HDMI output can be used to connect to a projector!



#### **Anti-Reflection**

With the dual gooseneck side lamp design, the direction of the light source can be adjusted according to the environment to prevent reflections.



#### **Smooth Dynamic Image**

With 30 fps capture every tiny movement during playback without delays.



#### Instant Image Adjustment

An auto tune button adjusts the clarity, brightness, and color according to the actual environment automatically. A new image process technology increases its function so the image adjustment becomes more efficient.




#### **Built-in LED Backlight**

With the largest sized of builtin LED backlight in this industry, users no longer need to constantly adjust the position of X-rays, photos, negatives, and slides during a presentation.

## Specifications

Sensor	1/3" 3M CMOS Color Image Sensor	Audio/Video Recording	One-touch records image and sound synchronously
Megapixels	3.1MP		
Zoom	20x	Built-in Memory	240 JPEG
Digital Zoom	12x	USB Flash Drive	for USB flash drives (up to 4TB) or wired / wireless mouse for annotation
Output Resolution	XGA, SXGA, WXGA, 1080p		
Frame Rate	30 fps	Built-in Microphone	Yes
Shooting Area Max.	440 x 330 mm (17.3" x 13") > A3 size	Image Capture	Single or continuous capturing
Built-in Back Light Size	210 x 297 mm (8.3″ x 11.7″)	Auto Tune	Yes, one button for image optimization
High Color Reproduction	ΔE*ab 12.3 (mean)	Image Rotation	0°, 180°, flip, mirror
SNR	51 dB	Anti-Theft	Kensington anti-theft lock device
Sharpness	MTF 967 lines	Free Lumens™ Software	Support PC Windows 10, 8, 7, XP, Vista, Mac OSX, Chrome OS, iOS, Android APP ; WIA & TWAIN interface
Lamps	Dual LED side lamps supported by a gooseneck		
Input Interface	VGA, HDMI	Dimensions: (LxWxH)	Folded : 566x385x152 mm (22.3"x15.2"x6") Open : 466x385x588 mm (18.3"x15.2"x23.1")
Output Interface	VGA x 2, HDMI, C-Video		
USB Image Transmission	USB 2.0 (480 Mbps) high-speed transmission		

#### I/O Connections

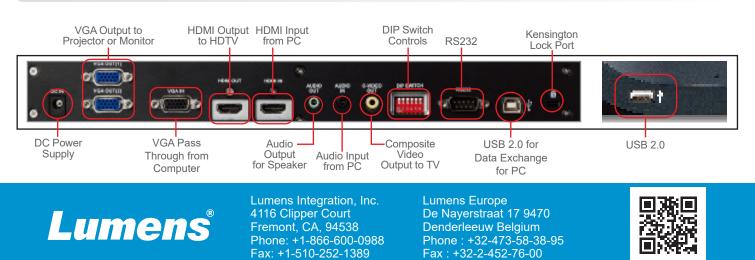

Lumens is the registered trademark of Lumens Digital Optics Inc. Changes in specification or design may be made without notification.

www.MyLumens.com