

VC-BC701P 4Kp60 Box Camera

Lumens[®]


Lumens[®] VC-BC701P is a 4K(3840x2160) 60fps and 30x optical zoom High Definition block camera. The VC-BC701P contains HDMI 2.0 and Ethernet output in a compact design and support triple stream and PoE, which is ideal for house of worship, education, sports production, broadcast television, news/weather-casts, corporate video, courtroom capture, live streaming, and a variety of ProAV applications.

Key Features

- 4K 60fps UHD
- 30x optical zoom, 68 degrees horizontal viewing angle
- HDMI and Ethernet video outputs
- Triple stream video, support HEVC(H.265) / H.264 format
- Supports RTSP / RTMP / RTMPS / MPEG-TS / SRT streaming protocol
- Supports PoE (Power over Ethernet)
- Supports Line / MIC audio input



More Details



UHD 4K High Image Quality

The VC-BC701P is equipped with a professional 1/2.5 inch image sensor with UHD 4K output resolution. The sensor provides high color reproduction, high-definition signals, and crystal-clear image quality.



Multiple Signal Interface

The VC-BC701P has multiple interfaces like Ethernet and HDMI for image outputs.




Supports PoE for Easy Installation

Power supplied through the PoE (Power over Ethernet) without additional power supply and cables that bring cost-effective and simple installation.

Product Specifications

Sensor	1/2.5" 8.57MP CMOS	Exposure Control	Auto / Manual
Video Format	2160p: 60 / 59.94 / 50 / 30 / 29.97 / 25 1080p: 60 / 59.94 / 50 / 30 / 29.97 / 25 1080i: 59.94 / 50 720p: 59.94 / 50	WDR	Yes
Video Output (HD) Interface	HDMI 2.0 / Ethernet	3D NR	Yes
Optical Zoom	30x	Image Flip	Yes
Digital Zoom	12x	Preset Positions	256
Horizontal Viewing Angle	68°	Multiple Video Stream	HEVC 4Kp 59.94 H.264 1080p 59.94 H.264 640x360p 29.97
Vertical Viewing Angle	38.3°	Audio Compression Format	G.711 / AAC
Diagonal Viewing Angle	78°	Control Interface	RS-232 / Ethernet
Aperture	F1.6 ~ F3.4	Control Protocol	VISCA / PELCO D / ONVIF
Focal Length	4.6mm ~ 135mm	Tally Light	Yes
Shutter Speed	1/8 ~ 1/10,000 sec	PoE	PoE (IEEE802.3af)
Minimum Object Distance	1.5m (Wide / Tele)	Video Stream	RTSP / RTMP / RTMPS / MPEG-TS / SRT
Video S/N Ratio	> 50dB	Video Compression	HEVC(H.265) / H.264
Minimum Illumination	0.1 lux (F1.6, 50IRE, 30fps)	Audio In	Line In / Mic In (Phone Jack 3.5mm x1)
Focus System	Auto / Manual	Audio Out	Line Out (Phone Jack 3.5mm x1) Ethernet / HDMI
Gain Control	Auto / Manual	DC In	12V +/- 20%
White Balance	Auto / Manual	Power Consumption	PoE : 10W DC In : 9W
		Weight	2.2lbs (1 kg)
		Dimensions	6.7" x 2.6" x 2.6" (170 x 67 x 67 mm)

I/O CONNECTIONS

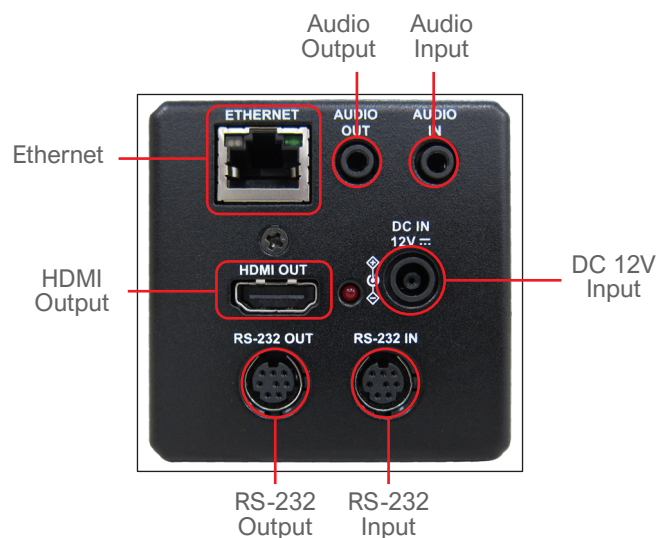

Lumens[®]

www.MyLumens.com

Lumens Integration, Inc.
4116 Clipper Court
Fremont, CA, 94538
Phone: +1-866-600-0988
Fax: +1-510-252-1389

Lumens Europe
De Nayerstraat 17 9470
Denderleeuw Belgium
Phone: +32-473-58-38-95
Fax: +32-2-452-76-00

